


VIG-US730VT-D6 5MP IP66

Outdoor IP Camera

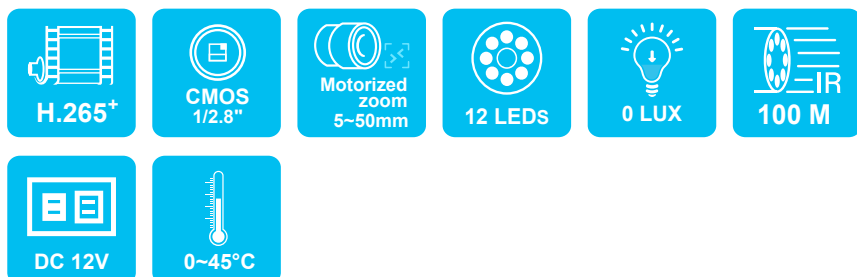

- › SONY 5MP 1/2.8" CMOS image sensor with excellent image quality.
- › Real-time H.265+/H.264/MJPEG compression (Dual Codec).
- › With a 2.8mm~12mm motorized motor lens, it is convenient for users to adjust the sharpness of the recognition area.
- › Maximum resolution 2560x1920 at 15 fps.
- › 12 High Power IR LEDs, IR Range 100 M.
- › Support ONVIF international standard, best compatibility, and integration.

SPECIFICATIONS

System- Flash: 16MB

RAM: 256MB

Image Sensor- FullHD High Quality 1/2.8" SONY CMOS Image Sensor

Lens- Motorized / Automatic Zoom 5~50mm

ICR- Built-in Magnetic Infrared Filter Switch

Low Lux- 0 Lux (IR ON)

Number of LED- High Power IR LEDs x12

Image- H.265+: 2560x1920 at 15 fps

H.265+: 2048x1536 at 20 fps

H.265+: 1920x1080 at 30 fps

H.265+, H.264, JPEG Multi-mode compression (Dual Codec)

Support Simultaneous multiple streams

Image Adjustment- Adjustable image size, quality, and bit rate

Time/Date stamp and text caption overlay

Configurable brightness, contrast, saturation, sharpness,
white balance and exposure

Have: AGC\ AWB\ AES\ BLC\ WDR Features

Network Interface- 10 /100 Mbps, RJ-45

Communication Protocol- IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS

Browser- Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

Alarm and Event Management- Abnormal Detection

Notify via email or upload files to FTP

Users- 8 clients online monitoring simultaneously

Multi-level users access control with password protection

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Maintenance- Supports FOTA

I/O- RJ-45 network port, power input DC12V

Power- DC12V

Max. Power Consumption- 3.6W(IR OFF), 18W(IR ON)

Weight- Net weight: 1235g

Dimension (WxDxH)- 315.5 x 147 x 116 mm

Operating Temperature- 0 ~ 45 °C

IP Rating- IP66

Version updating is not going to inform, please check the on-going updating information