


VIN-UJ711HE-F7 5MP

IP Camera

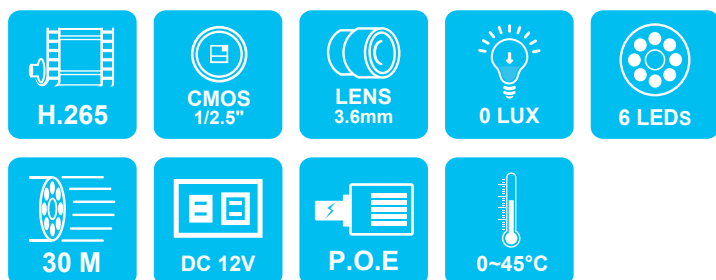

- › 5MP 1/2.5" CMOS Image Sensor with excellent image quality
- › Real-time H.265, H.264, MJPEG compression (Dual codec)
- › Maximum resolution 2560x1920 at 30 fps
- › 6 High Power IR LEDS, IR Range 30 M
- › Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

Video System- Flash : 128MB

RAM : 128MB

Image Sensor- FullHD High Quality 1/2.5" CMOS Image Sensor

Lens- 3.6 mm

IR-cut- Built-in Magnetic Infrared Filter Switch

Low Lux- 0 Lux (IR ON)

IR LEDs- High Power IR LEDS X 6

Image Quality- H.265/H.264: 2560x1920 at 30 fps

H.265/H.264: 1920x1080 at 30 fps

H.265 、 H.264 、 JPEG Multi-mode compression
(Dual Codec)

Support Simultaneous multiple streams

Image Settings- Adjustable image size, quality, and bit rate

Time/Date stamp and text caption overlay

Adjustable brightness, contrast, saturation,
and sharpness

Support AGC 、 AWB 、 AES 、 BLC 、 WDR Features

Electronic Shutter- 1/2 ~ 1/100,000 Sec

Network Interface- 10/100 Mbps Ethernet, RJ-45

Communication Protocol- IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS

Browser- Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

Alarm and Event Management- Human Detection Alarm

(Alarm Zone setting and Intrusion Alarm setting)

Notify via email or upload files to FTP.

Version updating is not going to inform, please check the on-going updating information

| SPECIFICATIONS

- Users-** 8 clients online monitoring simultaneously.
Multi-level user access control with password protection.
- Maintenance-** Supports FOTA
- I/O-** RJ-45 network port, power input port DC12V
- Power-** DC12V or PoE IEEE802.3af Class 0
- Max. Power Consumption-** 3.6W(IR OFF) 、10W(IR ON)
- Weight-** Net weight: 405g
- Dimensions-** Ø 70.3mm x 103mm
- Operating Temperature-** 0°C ~ 45°C

Version updating is not going to inform, please check the on-going updating information