


VIN-US730T-E6 5MP IP66

Electronic Auto AF motor lens IP cam

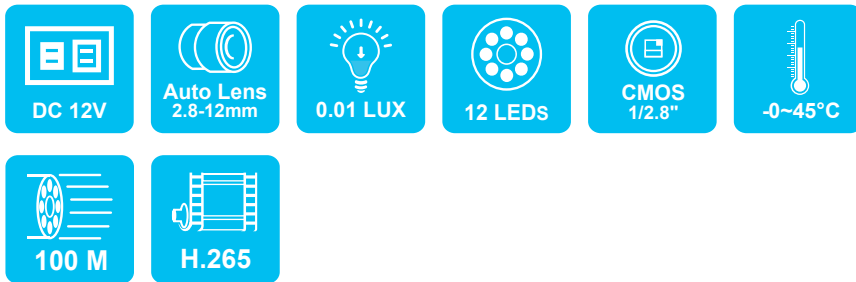

- › Sony 5MP 1/2.8" COMS Image Sensor
- › Built in electronic auto AF Lens motor, user friendly for remote config
- › Real-time H.265/H.264 Compression(dual codec)
- › Highest Resolution 2592*1944 @30 fps
- › HI-P 12 LED, IR Distance 100M
- › Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

system- Flash : 256MB

RAM : 512MB

Image Sensor- SONY FullHD High Quality 1/2.8" CMOS Image Sensor

Lens- Auto Varifocal 2.8-12mm

IR-cut- Removable IR-cut filter for day & night function

Low Lux- 0.01Lux

IR LED- HI-P 12 IR LED

Video- H.265/H.264: 2592x1944 at 30 fps

H.265/H.264: 2560x1440 at 60 fps

H.265/H.264: 2048x1536 at 60 fps

H.265/H.264: 1920x1080 at 60 fps

H.265 、 H.264 Multi-mode compression (Dual Codec)

Support Simultaneous multiple streams

Image Settings- Adjustable image size, quality, and bit rate

Time/Date stamp and text caption overlay

Configurable brightness, contrast, saturation, sharpness, white balance and exposure

Have: AGC 、 AWB 、 AES 、 BLC 、 WDR Features

Electronic Shutter- 1/2 ~ 1/100,000 Sec

Networking Interface- 10 /100 Mbps, RJ-45

Protocol- IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS

browser- Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

Alarm and Event Management- Motion Detection

Event notification using SMTP or FTP

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

- Users-** clients on-line monitoring at the same time
Multi-level user access control with password protection
- Maintenance-** Supports online firmware upgrade
- I/O-** RJ-45 Ethernet x 1,DC12V
- Power-** DC12V
- Max. Power Consumption-** 3.6W(IR OFF) 、 10W(IR ON)
- Weight-** N.W. : 650g
- Dimension-** 255mm x 75.3mm x 75mm
- Operating Environments-** 0 ~ 45 °C
- IP Rating-** IP66

Version updating is not going to inform, please check the on-going updating information