


# VIN-US731-E6 5MP IP67

## IP Camera

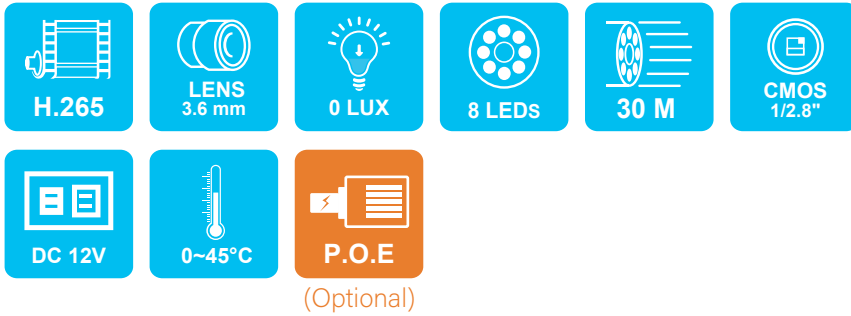

- › SONY 5M Pixels 1/2.8" CMOS Sensor with excellent image quality
- › Real time H.265/H.264 /MJPEG Multi-Mode compression (Dual Codec)
- › Resolution 2592\*1944 @ 30fps/s
- › HI-P 8 LED, IR Distance 30M
- › Support ONVIF international standard, best compatibility and integration

## SPECIFICATIONS

---

**System-** Flash : 256MB

RAM : 512MB

**Sensor-** Full HD High Quality 1/2.8" SONY CMOS Image Sensor

**Lens-** 3.6mm Lens

**IR Cut-** Removable IR Cut filter

**Lux-** 0 Lux(IR ON)

**LED-** HI-P 8 LED

---

**Compression-** H.265/H.264: 2592x1944 at 30 fps

H.265/H.264: 2560x1440 at 60 fps

H.265/H.264: 2048x1536 at 60 fps

H.265/H.264: 1920x1080 at 60 fps

H.265、H.264、JPEG Multi-mode compression (Dual Codec)

Multi-mode compression streaming

**Video Adjustment-** Resolution、Quality and bit rate

Time、Date or custom text and it's position

Brightness, Contrast, Saturation and Sharpness

AGC、AWB、AES、BLC、WDR

**Network Interface-** 10 /100 Mbps RJ-45

**Protocol-** IPv4,TCP/IP, DHCP, HTTP, RTSP,SNTP,DNS

**Browser-** Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

**Alarm & Event notification-** Motion Detection

E-mail notification or upload file to FTP

**User-** Max. 8 users for live view simultaneously

User Authorization

**OTA-** OTA for Firmware upgrade

---

Version updating is not going to inform, please check the on-going updating information

## SPECIFICATIONS

---

<b>I/O Port-</b>	RJ-45, DC12V, Audio in
<b>Power-</b>	DC12V or PoE IEEE802.3af Class 0 (optional)
<b>Power Consumption-</b>	3.6W(IR OFF) 、 18W(IR ON)
<b>Weight-</b>	N.W. : 965g
<b>Dimension-</b>	315x88x87 mm
<b>Operating Environments-</b>	0 ~ 45 °C
<b>IP-</b>	IP67

---

Version updating is not going to inform, please check the on-going updating information

Distributed BY

FUHO TECHNOLOGY CO., LTD.

Head Office: No. 30, Lane 726, Jinma Rd, Sec. 3, Chang Hua City, Taiwan 500. TEL:886-4-751-2881

[www.vacron.com](http://www.vacron.com)