

Mobile DVR for Motorcycle


Quick User Manual

2 Channel H.264 FULL HD 1080P



※Memory card is excluded, please purchase it separately.

2CH DVR

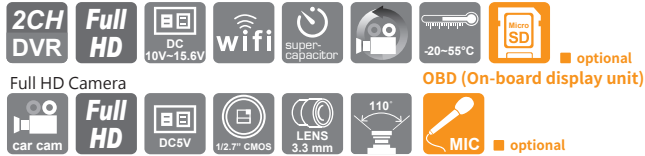

Product Accessories

■ Standard Set:

1. Camera*2
2. Camera extended cable 2 meter*1pc + 1 meter*1pc
3. Power cable
4. USB WIF dongle
5. Velcro
6. Quick guide manual


■ Optional:

1. 8/16/32G/64G/128G Class10 above SD card
2. OBD (On-board Display unit)

H12A0E5800

Installation diagram



Installation on motorcycle (For example)

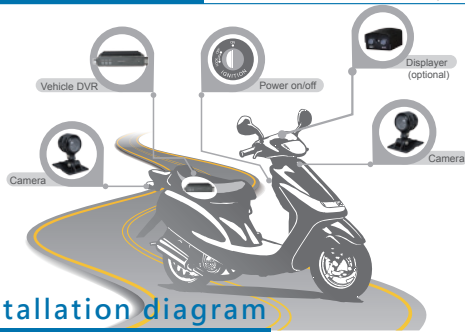


DVR installation diagram

Method 1: Connect DVR with battery, and then sets ON/OFF switch. The DVR use independent power supply.

Method 2: DVR connect with motorcycle power supply (ACC ON), the DVR will be activated when motorcycle engine is on.

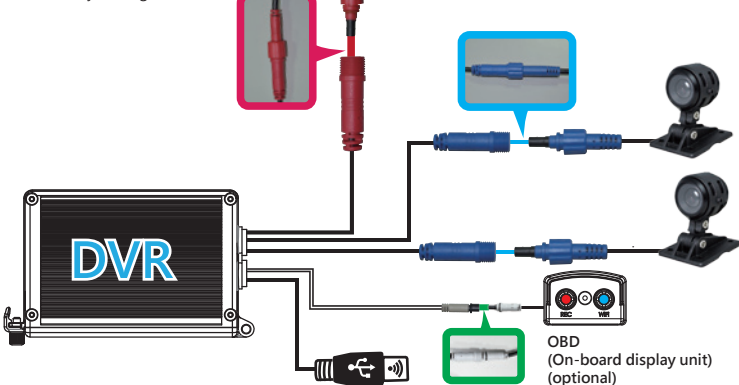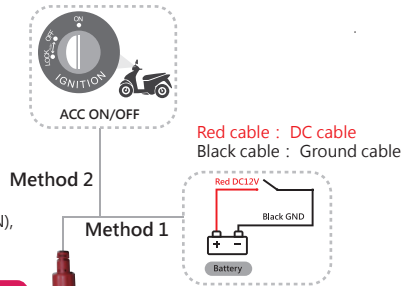

Appearance

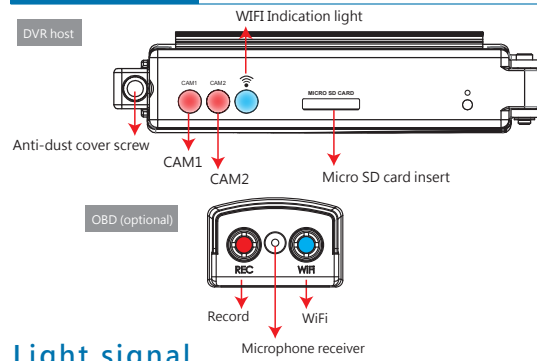

Light signal

1. Boot / Recording

Device boots after power on and wait approx. 20-30 sec. Red light will constantly bright after power on, and then system starts to record when REC red light is flashing.

Host Indicator

- CAM1 indication light: as red light, if light off, no cameras detected. If light in flashing, it starts recording. In rapid flashing as triggered for recording instant events.
- CAM2 indication light: as red light, if light off, no cameras detected. If light in flashing, it starts recording. In rapid flashing as triggered for recording instant events.
- WiFi indication light: as blue light. Light off as no WiFi dongle detected. Light on as connecting to WiFi.

Display signal indicator

- REC indicator: as Red light. Light off as 1 CH or 2 CH camera undetected. In flashing as in recording. In rapid flashing, as events trigger recording.
- WiFi indicator: as blue light. Light off as WiFi dongle undetected. Light on as connecting to WiFi.

2. Shut off/Stop recording

The DVR will keep recording 3 seconds after power off, at this point, system will write the buffer back to SD card. In addition, after all light turn off, user can remove SD card and get all video files from it.


⚠ Attention

For ensure recording system working correctly, please play and check storage files on PC regularly.

Viewer

*Notes:

- (A) To do this, the software should be installed DirectX 9.0 or above.
- (B) Support OS: WINDOWS 7,8,10, does not support MAC OS
- (C) The recommended hardware requirements: i3 above grade 2.7GHZ, RAM: 4G or more, more preferably independent display card

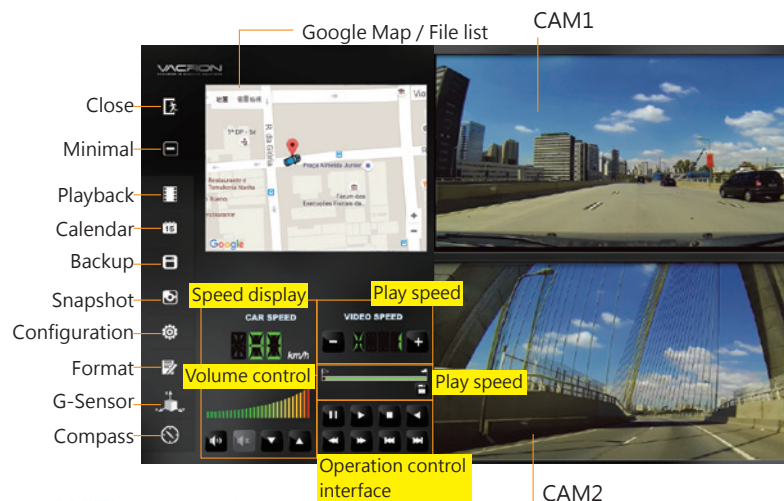


WiFi Connection

VACRON MOTO for IOS



VACRON MOTO for android



機車用監控系統

簡易操作手冊

2路 H.264 FULL HD 1080P



DVR主機

Full HD 攝影機

※記憶卡並不隨機提供，請另外購買。

2CH DVR主機



Full HD 攝影機



產品配件

標配:


- 攝影機 *2
- 攝影機延伸線 2米* 1條+1米* 1條
- 電源線
- USB WiFi dongle
- 魔鬼氈
- 簡易手冊

選配:

- 簡易型顯示器
- 8 / 16 / 32 / 64 / 128G Class10以上SDHC/SDXC Micro SD Card

H12A0E5800


安裝示意圖

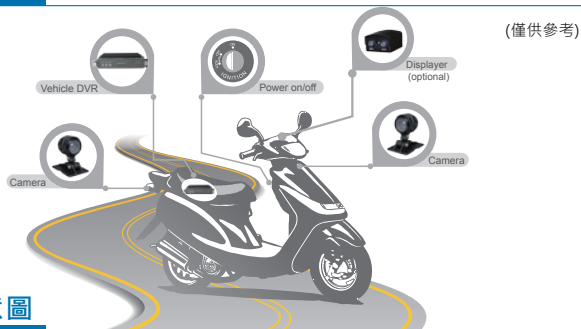


配線示意圖

方法1: 連接蓄電池，接ON/OFF開關，行車記錄器為獨立電源。

方法2: 行車記錄器連接機車鑰匙孔 (ACC ON)，機車啟動時，機器電源即啟動。

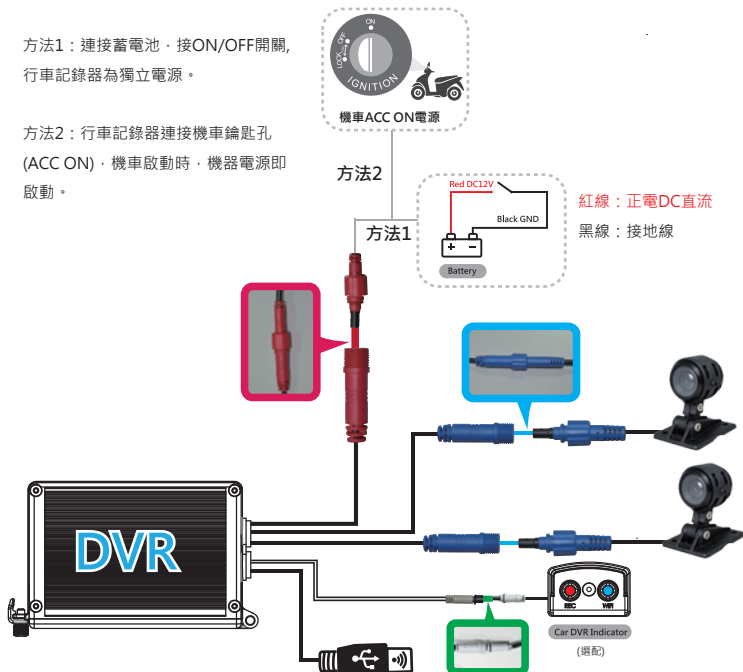

產品外觀

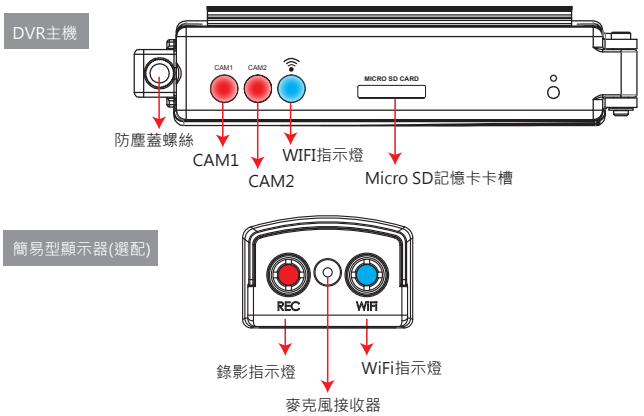

燈號/功能說明

1. 開機/錄影

電源啟動，並等待約20~30秒後，即開機完成。記錄器開機過程中當REC紅燈會呈現閃爍狀態，即表示開始錄影。

主機燈號示意

- CAM1指示燈：燈號顯示為紅色，無亮表示未偵測到攝影機，閃爍表示錄影中，快速閃爍表示觸發事件錄影。
- CAM2指示燈：燈號顯示為紅色，無亮表示未偵測到攝影機，閃爍表示錄影中，快速閃爍表示觸發事件錄影。
- WiFi指示燈：燈號顯示為藍色，無亮燈表示未偵測到WiFi dongle，恆亮表示連線中。

顯示器燈號示意

- REC指示燈：燈號顯示為紅色，無亮表示1CH OR 2CH未偵測到攝影機，閃爍表示錄影中，快速閃爍表示觸發事件錄影。
- WiFi指示燈：燈號顯示為藍色，無亮燈表示未偵測到WiFi dongle，恆亮表示連線中。

2. 開機/停止錄影

電源關閉後會延遲約3秒鐘才停止錄影，此時系統將緩衝區回寫至SD卡，待指示燈熄滅後，即可取下記憶卡讀取所攝錄之檔案。

⚠ 使用注意事項

若無選配抬頭顯示器時，建議定期檢查與使用電腦播放影像，確保錄影系統的正常運作。

Viewer 介面

注意事項:

- 要執行此軟體須安裝 DirectX 9.0 以上。
- 支援作業系統: WINDOWS 7、8、10，不支援MAC OS
- 建議的硬體需求: i3以上等級 2.7GHZ，RAM:4G以上、有獨立顯示卡更佳



馥鴻摩托APP

馥鴻摩托 IOS版

馥鴻摩托 ANDROID版

