



# 4 CH 1080P H.264 DTV Video Recorder



## DTV Surveillance **VDH-CK200**

**NEW** 2014 OCT. V1.1




- CPU special design for DVR with the best image process efficiency.
- Support 1 units of SATA/SATA II device up to 8TB HDD recording capacity.
- Advanced H.264 compress technology provides the best HDD space usage.
- Embedded Linux system, to eliminate the threat from virus and hacking.
- Support 4CHs of DTV Camera (1080P) video.
- Support HD output.
- Support CAMERA position layout and editable user definition.
- The USB mobile storage device.
- Support 3 users log on by Client-side software or browser.

# VDH-CK200

## 4CH 1080P H.264 DTV Video Recorder

### ■ INSTALLATION

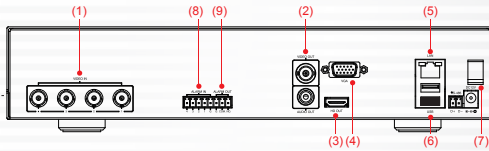

1. VIDEO IN
2. VIDEO OUT
3. HD OUT
4. VGA
5. LAN
6. USB
7. DC12V
8. ALARM IN (OPTIONAL)
9. ALARM OUT (OPTIONAL)

### ■ SPECIFICATIONS

System	CPU: CPU special design for DVR with the best image process efficiency. Operating system : Linux
Storage Device/ Interface	Build in SATA interface x 1 , compatible SATA/SATAII HDD( Max. 8TB)
User Interface	DVR IR remote control
Video And Other I/O Interface	Alarm OUT x1 / Alarm IN x4 (optional) Headphones (speakers) sound output x1
Network Protocol	IPv4 、 ARP 、 TCP 、 UDP 、 ICMP 、 SMTP 、 HTTP 、 PPPoE 、 DDNS 、 UPnP 、 DHCP
Video Format	H.264 compression format E-Map
Live / Playback	Real-time Live View capable 4CH VGA @30fps or 1CH 1080P @30fps 1CH 1080P @30fps : 4CH VGA @30fps Synchronous Playback Recording Query: Time search, Event list ( CAM displacement, Alarm I / O triggered alarm notification(optional) ) Playback speed/ slow forward / fast forward in 5 different speed, Play Frame by Frame mode (forward or backward) Pentaplex operation: Live/ Record/ Playback
Event Notification	Event Notification : Alarm I/O trigger(optional), Motion detection, Video loss, HDD error
Recording Mode	Constant recording Schedule recording Alarm triggered recording (include motion detection recording): Complete event video reserved 5 seconds before and 60 minutes after event taken place. Manual recording Schedule alarm triggered recording (include motion detection recording): Complete event video reserved 5 seconds before and 60 minut after event taken place. Only recording without live (depending on user authority)
Backup Management	Video output format: AVI The USB mobile storage device
System Management	Remote Client software; live, playback set up by PC(remote side) Authorization: Maximum 10 group accounts, Hierarchical authority Support 3 users log on by Client-side software or browser Systems operation records, record login time, IP and selected video. Browser: MS IE7-IE11
Support Equipment	Support megapixel DTV Camera video
Power	DC12V / 3A
Operating Temperature	0-45 ℃
Weight	About 2.1kg
Dimension	315mm x 220mm x 60mm (W x D x H)

\*Product specifications are subject to change without notice; please contact us for the latest information.

### ■ DISTRIBUTED BY

