



ONVIF

2 Megapixel Vandal Dome

IP Camera



IP Surveillance

VIG-DS782A

NEW 2016 AUG. V1.0





- Sony Exmor 1/2.9" CMOS Image Sensor.
- Real-time H.264,H.265+, MJPEG Compression(Dual Codec).
- Resolution : 1920 x 1080.
- Simultaneous Multiple Streams.
- 12 IR LEDs, IR Range 15M
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.

VIG-DS782A 2 Megapixel IR Bullet IP Camera



Dimension Unit: mm

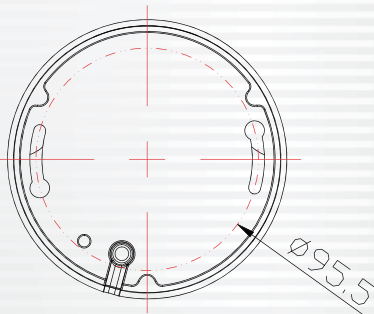

SPECIFICATIONS

System	Flash	: 16MB
	RAM	: 128MB
Image Sensor	FullHD High Quality 1/2.9" Sony Exmor CMOS Image Sensor	
Sensitivity	0 Lux (IR ON)	
IR LEDs	12PCS	
IR Range	15M	
Lens	Board Lens	3.6 mm F1.8
	Removable IR-cut filter for day & night function	
Video	H.264/H.265+	: 1920x1080 @25fps
	H.264/H.265+	: 1280x720 @30fps
	H.264/H.265+	: 640x480 @30fps
	Compression: H.264,H.265+,MJPEG Streaming: Dual Codec (H.264 · H.265+ · JPEG) Selectable	Support Simultaneous multiple streams
Image Settings	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	Configurable brightness, contrast, saturation, sharpness, white balance and exposure	
	AGC / AWB / AES / BLC / WDR	
Audio	Format	G.711 audio encoding
	Support Audio line-in for external microphone (optional)	
Networking	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
Alarm and Event Management	Motion Detection	
	Event notification using SMTP or FTP	
Users	8 clients on-line monitoring at the same time	
	Multi-level user access control with password protection	
Maintenance	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1,DC Jack x1,RCA Line in x1(optional)	
Power	DC12V or PoE IEEE802.3af Class 0 (optional)	
Max. Power Consumption	3.6W(IR OFF),7W(IR ON)	
Weight	Netweight: 450g	
Dimension	Φ120 x 60 mm	
Operating Environments	Temperature: 0 ~ 45 °C	Humidity: 90%

★Product specifications are subject to change without notice; please contact us for the latest information.

■ DISTRIBUTED BY

