



**ONVIF**

## 3 Megapixel Vandal Dome

IP Camera



IP Surveillance

### VIG-DSD55VE

**NEW** 2016 MAY. V1.0



- Sony Exmor 1/2.8" CMOS Image Sensor.
- Improved low-light performance.
- Real-time H.264, MJPEG Compression(Dual Codec).
- Resolution : 2048x1536.
- Simultaneous Multiple Streams.
- 24 IR LEDs, IR range 15M
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.

# VIG-DSD55VE


3 Megapixel Vandal Dome IP Camera



## SPECIFICATIONS

System	Flash	16MB
	RAM	256MB
Image Sensor	FullHD High Quality 1/2.8" Sony Exmor CMOS Image Sensor	
Sensitivity	0 Lux (IR ON)	
IR LEDs	24PCS	
IR Range	15M	
Lens	Varifocal 2.8-12mm F1.4	
	Removable IR-cut filter for day & night function	
Video	H.264,H.265+: 2048x1536 @15fps	
	H.264,H.265+: 1920x1080 @30fps	
	H.264,H.265+: 1280x720 @30fps	
	Compression: H.264,H.265+,MJPEG Streaming: Dual Codec (H.264 · H.265+ · JPEG) Selectable Support Simultaneous multiple streams	
Image Settings	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	Configurable brightness, contrast, saturation, sharpness, white balance and exposure	
	AGC / AWB / AES / BLC / WDR	
Networking	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
Alarm and Event Management	Motion Detection	
	Event notification using SMTP or FTP	
Users	8 clients on-line monitoring at the same time	
	Multi-level user access control with password protection	
Maintenance	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1,DC Jack x1	
Power	DC12V or PoE IEEE802.3af Class 0 (optional)	
Max. Power Consumption	3.6W(IR OFF),7W(IR ON)	
Weight	Netweight: 1050 g	
Dimension	W:Φ135mm H:110mm	
Operating Environments	Temperature: 0 ~ 45 °C Humidity: 90%	

★Product specifications are subject to change without notice; please contact us for the latest information.

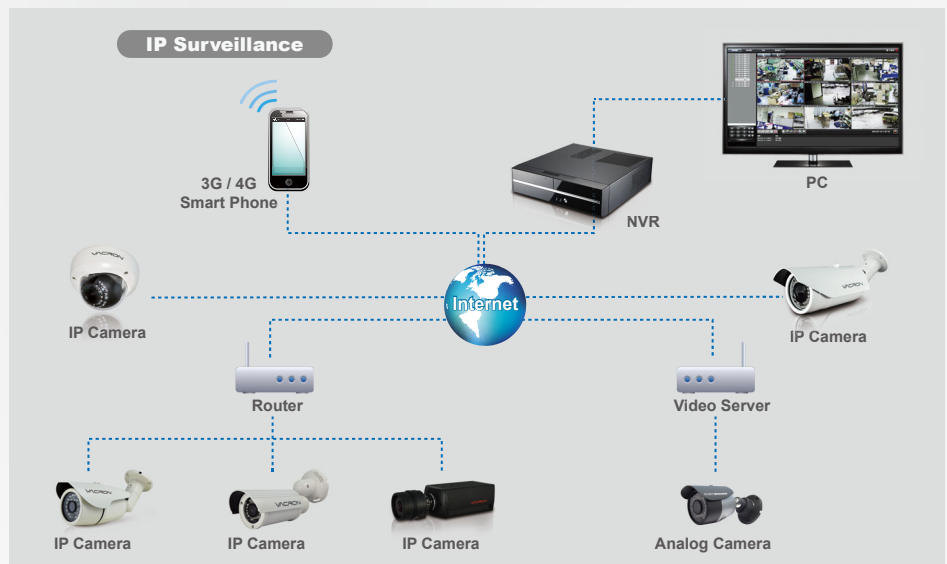

■ DISTRIBUTED BY

