



5 Megapixel IR Bullet

IP Camera



NEW 2017 SEP V2.0



IP Surveillance



VIG-UM730

- 5 Mega Pixel 1/3.2" CMOS Image Sensor.
- Real-time H.264,H.265+,MJPEG Compression(Dual Codec).
- Resolution : 2560x1920.
- Simultaneous Multiple Streams.
- 12PCS IR LEDs.
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability.

VIG-UM730 5 Megapixel IR Bullet IP Camera



Dimension unit:mm

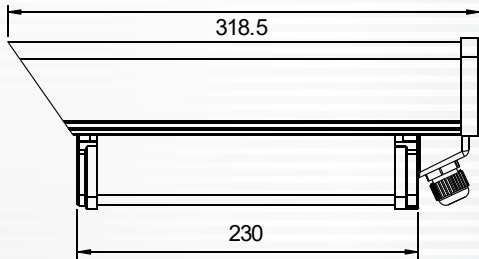


24 MIL 12 pcs IR LED

SPECIFICATIONS

| | | |
|---|--|--|
| System | Flash : 16MB | |
| | RAM : 256MB | |
| Image Sensor | 5 Megapixel High Quality 1/3.2 CMOS Image Sensor | |
| Sensitivity | 0 Lux (IR ON) | |
| IR LEDs | 12 pcs | |
| IR Range | 30 M | |
| Lens | Megapixel CS mount | |
| | Removable IR-cut filter for day & night function | |
| Video | H.264,H.265+: 2560x1920 @10fps | |
| | H.264,H.265+: 1920x1080 @30fps | |
| | H.264,H.265+: 1280x720 @30fps | |
| | H.264,H.265+: 640x480 @30fps | |
| Compression: H.264,H.265+, MJPEG Streaming: Dual Codec (H.264 · H.265+ · JPEG) Selectable | | |
| Support Simultaneous multiple streams | | |
| Image Settings | Adjustable image size, quality, and bit rate | |
| | Time/Date stamp and text caption overlay. | |
| | BNC connector for video output, NTSC/PAL video output switch | |
| | Adjustable image size, quality, and bit rate | |
| | Time/Date stamp and text caption overlay. | |
| Configurable brightness, contrast, saturation, sharpness, white balance and exposure | | |
| AGC / AWB / AES / BLC / WDR | | |
| Networking | Interface | 10/100 Mbps Ethernet, RJ-45 |
| | Supported Protocol | IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS |
| | Supported Browser | Microsoft Internet Explorer 6.0 or above |
| Alarm and Event | Motion Detection | |
| Managemnt | Event notification using SMTP or FTP | |
| Users | 8 clients on-line monitoring at the same time | |
| | Multi-level user access control with password protection | |
| Maintenance | Supports online firmware upgrade | |
| I/O | RJ-45 Ethernet x 1,DC Jack x1 | |
| IP Rating | IP66 | |
| Power | DC12V | |
| Max. Power Consumption | 3.6W(IR OFF),7W(IR ON) | |
| Weight | Netweight : 1235g | |
| Dimension | 315.5 x 147x 116 mm | |
| Operating Environments | Temperature: 0 ~ 45 °C | Humidity: 90% |

★Product specifications are subject to change without notice; please contact us for the latest information.

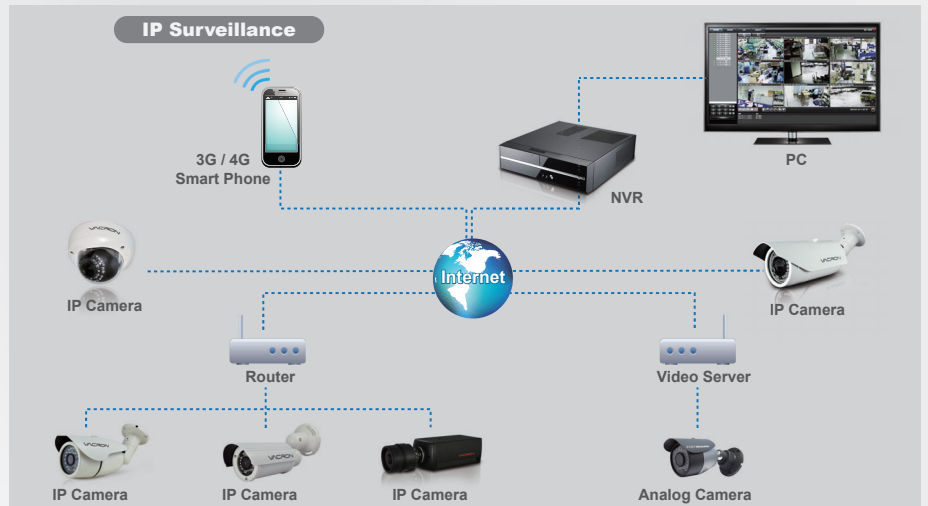

■ DISTRIBUTED BY

