



**ONVIF**

## 5 Megapixel IR Bullet

IP Camera



**NEW** 2017 NOV. V2.0



### IP Surveillance

## VIG-UM731VE

- 5 Mega Pixel 1/3.2" CMOS Image Sensor.
- Real-time H.264,H.265+, MJPEG Compression(Dual Codec).
- Resolution : 2560x1920.
- Simultaneous Multiple Streams.
- HI-POWER (35MIL)LED 2PCS, 30M IR ranges.
- Supports ONVIF Standard to Simplify Integrationand Enhance Interoperability.

# VIG-UM731VE 5 Megapixel IR Bullet IP Camera





## Full function cable (Optional)



1. GND
2. Alarm output 1
3. Alarm input 2
4. Alarm input 1
5. DC12V input
6. Reset Button
7. Analog Video Out
8. Audio Line in
9. RJ-45 Ethernet LAN Port

Dimension Unit: mm

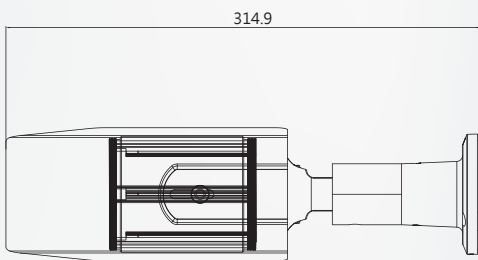

## SPECIFICATIONS

System	Flash : 16MB RAM : 256MB	
Image Sensor	5 Megapixel High Quality 1/3.2 CMOS Image Sensor	
Sensitivity	0 Lux (IR ON)	
IR LEDs	HI-POWER (35MIL)LED 2PCS	
IR Range	30M	
Lens	Varifocal 2.8~12mm F1.4 Removable IR-cut filter for day & night function	
Video	H.264/H.265 € 5MP(2560 x 1920) @10fps H.264/H.265 € 3MP(2048 x 1536) @25fps H.264/H.265 € 1600 x 1200 @30fps H.264/H.265 € 1080P @30fps H.264/H.265 € 720P @30fps H.264/H.265 € VGA @30fps H.264/H.265 € 270P @30fps H.264/H.265 € 352 x 240 @30fps Compression: H.264,H.265+,MJPEG Streaming: Dual Codec (H.264 H.265+ · JPEG) Selectable Support Simultaneous multiple streams BNC connector for video output, NTSC/PAL video output switch	
Image Settings	Adjustable image size, quality, and bit rate Time/Date stamp and text caption overlay. BNC connector for video output, NTSC/PAL video output switch Adjustable image size, quality, and bit rate Time/Date stamp and text caption overlay. Configurable brightness, contrast, saturation, sharpness, white balance and exposure AGC / AWB / AES / BLC / WDR	
Audio	Format	G.711 audio encoding
	Support Audio line-in for external microphone(Optional)	
Networking	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
Alarm and Event Management	Motion Detection Event notification using SMTP or FTP	
Users	8 clients on-line monitoring at the same time Multi-level user access control with password protection	
Maintenance	Supports online firmware upgrade	
I/O port	RJ-45 Ethernet x 1, DC Jack x 1 BNC Video out, Phone Jack Line in x 1, Alarm I/O, Reset Botton(Optional)	
On-board Storage	SD/SDHC card slot : Stores snapshots and video clips(Optional)	
IP Rating	IP66	
Power	DC12V or PoE IEEE802.3af Class 0	
Max. Power Consumption	3.6W(IR OFF),7W(IR ON)	
Weight	Netweight: 965g	
Dimension	315 x 88 x 87 mm	
Operating Environments	Temperature: 0 ~ 45 °C	Humidity: 90%

★Product specifications are subject to change without notice; please contact us for the latest information.



■ DISTRIBUTED BY

