



ONVIF

4 Megapixel IR Bullet

IP Camera



NEW 2017 NOV. V2.0



IP Surveillance

VIG-UME31

VIG-UME31V


- 4 Mega Pixel 1/3" CMOS Image Sensor.
- Real-time H.264,H.265+, MJPEG Compression(Dual Codec).
- Resolution : 2688x1520.
- Simultaneous Multiple Streams.
- HI-POWER (35MIL)LED 2PCS, 30M IR ranges.
- Supports ONVIF Standard to Simplify Integrationand Enhance Interoperability.

VIG-UME31 VIG-UME31V

4 Megapixel IR Bullet IP Camera




Dimension Unit: mm

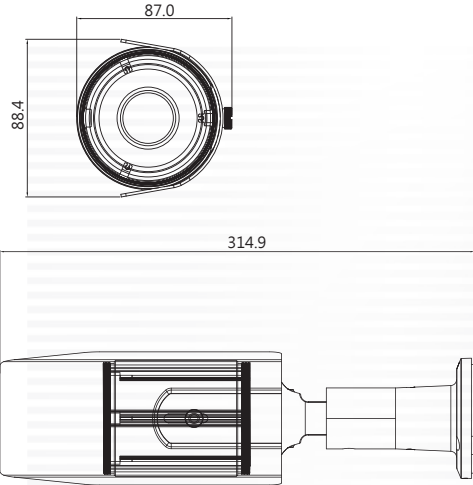

SPECIFICATIONS

Model	VIG-UME31	VIG-UME31V
System	Flash : 16MB RAM : 256MB	
Image Sensor	4 Megapixel High Quality 1/3" CMOS Image Sensor	
Sensitivity	0 Lux (IR ON)	
IR LEDs	HI-POWER (35MIL)LED 2PCS	
IR Range	30M	
Lens	Megapixel CS mount	Varifocal 2.8-12mm F1.4
	Removable IR-cut filter for day & night function	
Video	H.264/H.265+ : 2688x1520 at 12fps H.264/H.265+ : 1920x1080 at 30 fps H.264/H.265+ : 1600x1200 at 30 fps H.264/H.265+ : 1280x720 at 30 fps H.264/H.265+ : 640x480 at 30 fps Compression: H.264,H.265+ ,MJPEG Streaming: Dual Codec (H.264 H.265+ · JPEG) Selectable Support Simultaneous multiple streams	
Image Settings	Adjustable image size, quality, and bit rate Time/Date stamp and text caption overlay. BNC connector for video output, NTSC/PAL video output switch Adjustable image size, quality, and bit rate Time/Date stamp and text caption overlay. Configurable brightness, contrast, saturation, sharpness, white balance and exposure AGC / AWB / AES	
Networking	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
Alarm and Event Management	Motion Detection Event notification using SMTP or FTP	
Users	8 clients on-line monitoring at the same time Multi-level user access control with password protection	
Maintenance	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1,DC Jack x1	
IP Rating	IP66	
Power	DC12V or PoE IEEE802.3af Class 0 (optional)	
Max. Power Consumption	3.6W(IR OFF),7W(IR ON)	
Weight	Netweight: 965g	
Dimension	315 × 88 × 87 mm	
Operating Environments	Temperature: 0 ~ 45 °C Humidity: 90%	

★Product specifications are subject to change without notice; please contact us for the latest information.

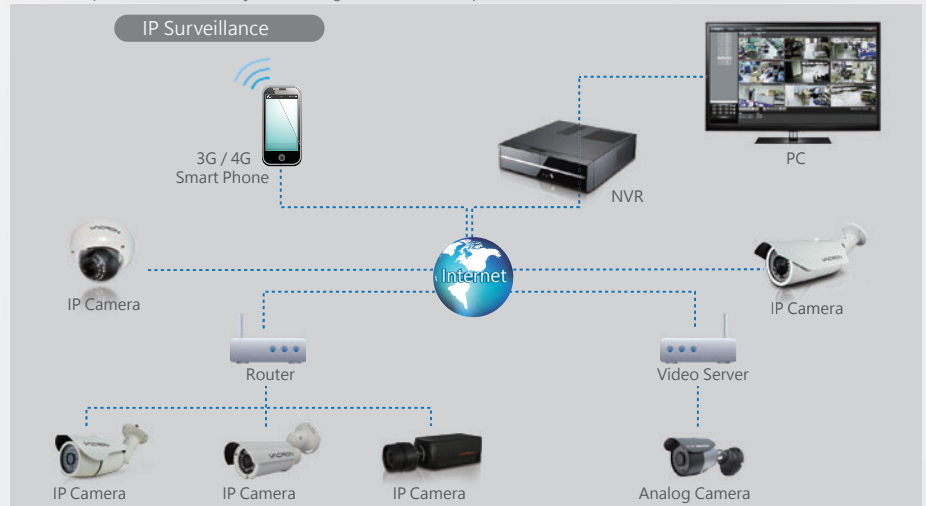

■ DISTRIBUTED BY

