



ONVIF

2 Megapixel IR Bullet

IP Camera



NEW 2017 MAY V2.1



IP Surveillance

VIG-US730A

VIG-US730AV

- Sony Exmor 1/2.9" CMOS Image Sensor .
- Real-time H.264,H.265+ ,MJPEG Compression(Dual Codec).
- Resolution : 1920x1080.
- Simultaneous Multiple Streams.
- 12 IR LEDs.
- Supports ONVIF Standard to Simplify Integrationand Enhance Interoperability

VIG-US730A/VIG-US730AV


2 Megapixel IR Bullet IP Camera



SPECIFICATIONS

Model	VIG-US730A	VIG-US730AV
System	Flash : 16MB RAM : 256MB	
Image Sensor	FullHD High Quality 1/2.9" Sony Exmor CMOS Image Sensor	
Sensitivity	0 Lux (IR ON)	
IR LEDs	12 pcs	
IR Range	30 M	
Lens	Megapixel CS mount	Varifocal 2.8-12mm F1.4
Video	Removable IR-cut filter for day & night function	
	H.264/H.265+ : 1920x1080 @30fps	
	H.264/H.265+ : 1280x720 @30fps	
	H.264/H.265+ : 640x480 @30fps	
Compression: H.264, H.265+, MJPEG Streaming: Dual Codec (H.264 · H.265+ · JPEG) Selectable		
Image Settings	Support Simultaneous multiple streams	
	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
	BNC connector for video output, NTSC/PAL video output switch	
	Adjustable image size, quality, and bit rate	
	Time/Date stamp and text caption overlay.	
Networking	Configurable brightness, contrast, saturation, sharpness, white balance and exposure	
	AGC / AWB / AES / BLC / WDR	
	Interface	10/100 Mbps Ethernet, RJ-45
	Supported Protocol	IPv4,TCP/IP,DHCP,HTTP,RTSP,SNTP,DNS
Supported Browser	Microsoft Internet Explorer 6.0 or above	
Alarm and Event Management	Motion Detection	
Intelligent Video Surveillance	Event notification using SMTP or FTP	
Users	Electronic Fence (optional) / Abandoned Object Detection (optional)	
	8 clients on-line monitoring at the same time	
Maintenance	Multi-level user access control with password protection	
	Supports online firmware upgrade	
I/O	RJ-45 Ethernet x 1,DC Jack x1	
IP Rating	IP66	
Power	DC12V or PoE IEEE802.3af Class 0 (optional)	
Max. Power Consumption	3.6W(IR OFF), 9.6W(IR ON)	
Weight	Netweight 1235g	
Dimension	315.5 x 147x 116 mm	
Operating Environments	Temperature: 0 ~ 45 °C , Humidity: 90%	
Optional features	SD card recording/ BNC (Video Out) / RCA (Audio IN or OUT) / Alarm I/O (2 IN, 1 OUT) / Reset button (Please consult with the sales representative for detailed information)	

★Product specifications are subject to change without notice; please contact us for the latest information.

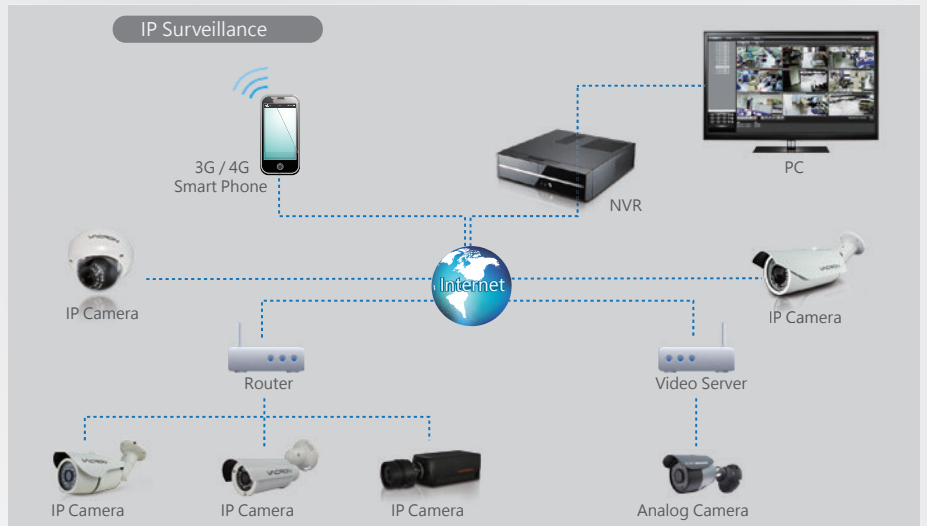

■ DISTRIBUTED BY

