


VDN-DKZ604E 5MP

4CH video recording system

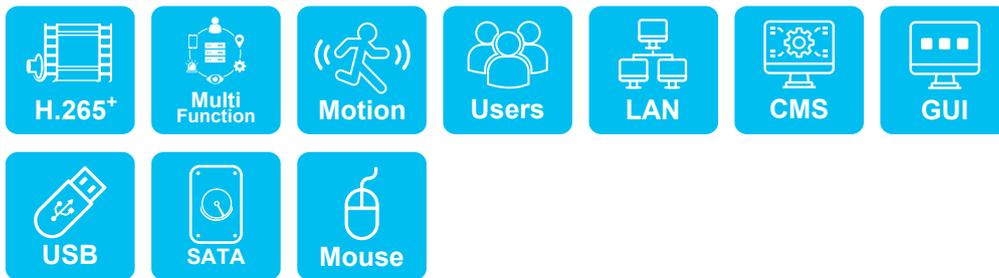

- › Multitasking: which can Record / Playback / Remote Connection / Mobile phone watch and playback at the same time.
- › The maximum supporting capacity for a single hard disk is 10TB.
- › Support HD ultra high definition output.
- › It supports remote WEB-Client browsing for live monitoring and playback functions.
- › Provide HTTP, DHCP, DDNS, NTP, SMTP, FTP, DNS, UPNP, PPPoE, IP authority, and other network services.
- › It supports iPhone, and Android video monitoring and playback.
- › It supports CMS (Central Management System).
- › It can be set as a Hybrid function to connect traditional analog signals and digital IP signals at the same time and the IP channel can be set at will.
- › With the P2P function, scan the QR code through the APP for real-time monitoring and playback to increase information security.
- › Applicable for VACRON IP camera with no extra operation or settings other than plugging.
- › Applicable for ONVIF IP camera.
- › Applicable for RTSP IP camera.
- › Supports VACRON recording devices.
- › It supports AHD, TVI, CVI, CVBS, and IP signal inputs.

SPECIFICATIONS

| | |
|----------------------------|--|
| Video Input- | 4 CH of BNC input |
| Video Output- | VGA output (Max. 1920x1080) HD OUT output (Max. 1920x1080) |
| Audio Input- | 4 CH RCA output |
| Audio Output- | 1 CH RCA output |
| Audio Compression- | G.711U |
| <hr/> | |
| Digital Zoom in- | YES |
| Sequence- | YES |
| Video Compression- | H.264 / H.265 / H.265+ |
| Recording Frame- | 4CH 5MP @6FPS/CH ; 4CH 1080P @15FPS/CH ; |
| Recording Mode- | Continuity, Scheduling, Motion |
| Motion Detection- | Grid setting, 192(16x12) detection zones can be set. |
| Playback- | Video playback up to 1 channel 5MP@6 FPS/sec, or 1 channel 1080P@15 FPS/sec or 4 channel VGA |
| Display Mode- | Single / Quad |
| Backup File Format- | MP4 / Self-Defined Format |
| Backup File Method- | USB / WEB |
| Network Services- | HTTP, DHCP, DDNS, NTP, SMTP, FTP, DNS, UPNP, PPPoE, IP Authority |
| Network Connection- | Live View Search, Playback, Backup, and Update |
| Browser- | IE / WEB-Client |

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

| | |
|--|--|
| HDD Storage Interface- | SATA x1 |
| Maximum Supported Capacity- | 10TB per unit |
| Network Socket- | RJ-45 x1 (10/100 Base-T) |
| USB- | Back plate USB2.0 x2 |
| File System- | Stable and reliable self-developed file system |
| S.M.A.R.T- | Hard Disk Error Check |
| Port- | RS-485 (Pelco-D/Pelco-P) |
| Operation menu- | GUI interface; VGA & HD out can be displayed simultaneously |
| Input method- | Mouse |
| Internal Buzzer- | Start-up Beep |
| Languages- | English, Traditional Chinese, Simplified Chinese, Japanese |
| Firmware Update- | USB update or Network Update(OTA) |
| APP Monitoring- | iPhone, Android, Mobile App supports Live view& audio, playback and back-up |
| CMS (Central Management System)- | Supports |
| Hybrid Function (Digital & Analog)- | Supports |
| Operating Environment- | Celsius 0 ~ 40 degrees, humidity 20 ~ 80% |
| Power Supply- | DC 12V / 3A(AC100V~240V 50/60HZ) |
| Net Weight (Gross Weight)- | About 0.5kg (excluding HDD and Power Adapter) |
| Dimensions- | 255mm × 216mm × 42mm (L×W×H) |

Version updating is not going to inform, please check the on-going updating information