
VIG-US763T-D6 5MP IP66

IP Camera







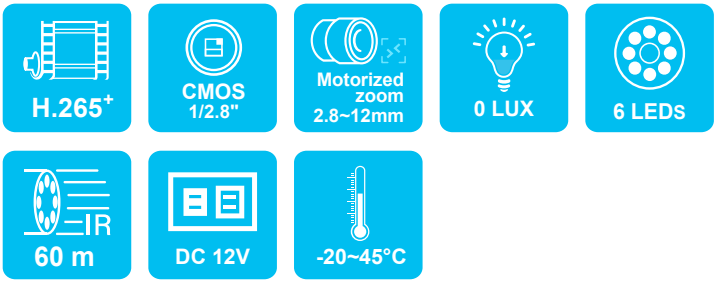

- SONY 5M Pixels 1/2.8" CMOS Sensor with excellent image quality
- Real-time H.265+, H.264, MJPEG compression (Dual codec)
- Built-in electronic auto focus (AF) lens motor, user friendly for remote config
- Maximum resolution 2592x1944 at 15 fps
- 6 High Power LEDS, IR Range 60 M
- Support the ONVIF international standard, best compatibility and integration

VIG-US763T-D6 Detailed Information

SPECIFICATIONS

System-	Flash：16MB
	RAM：256MB
Image Sensor-	Full HD High Quality 1/2.8" SONY CMOS Image Sensor
Lens-	Motorized / Automatic Zoom 2.8~12mm
ICR-	Built-in Magnetic Infrared Filter Switch
Low Lux-	0 Lux(IR ON)
LEDs-	High Power IR LEDS X 6

Image-	H.265+: 2560x1920 at 15 fps
	H.265+: 2048x1536 at 20 fps
	H.265+: 1920x1080 at 30 fps
	H.265+、H.264、JPEG Multi-mode compression (Dual Codec)
	Support simultaneous multiple streams
Image Adjustment-	Adjustable image size, quality, and bit rate
	Time, date, or custom text can be displayed on the image, and the display position can be set.
	Adjustable brightness, contrast, saturation, and sharpness
	Support AGC、AWB、AES、BLC、WDR Features
Network Interface-	10 /100 Mbps RJ-45
Communication Protocol-	IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS
Browser-	Microsoft Internet Explorer 6.0 or above
	Safari, Chrome, or Firefox
Alarm and Event Management-	Motion Detection
	Notify via email or upload files to FTP
Users-	8 clients online monitoring simultaneously
	Multi-level user access control with password protection

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Maintenance-	Supports FOTA
I/O-	RJ-45 network port, power input port DC12V
Power-	DC12V
Max. Power Consumption-	3.6W(IR OFF) 、18W(IR ON)
Weight-	Net weight: 1220g
Dimensions (W×D×H)-	320x160x110mm
Operating Temperature-	-20 ~ 45 °C
IP Rating-	IP66

Version updating is not going to inform, please check the on-going updating information