VIN-DS755TEA-EA 1080P

Vandal Dome IP Camera

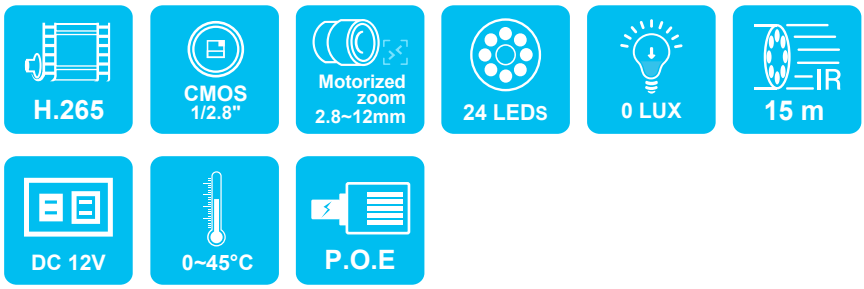

- SONY 2M Pixels 1/2.8" CMOS Sensor with excellent image quality
- Built-in electronic auto focus (AF) lens motor, user friendly for remote config
- Real-time H.265/H.264 compression (Dual Codec)
- Maximum resolution 1920x1080 at 60 fps
- 24 IR LEDs, IR Range 15M.
- Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

System-	Flash：256MB
	RAM：512MB
Image Sensor-	SONY FullHD High Quality 1/2.8" CMOS Image Sensor
Lens-	Motorized / Automatic Zoom 2.8-12mm
IR-cut-	Built-in Magnetic Infrared Filter Switch
Low Lux-	0 Lux(IR ON)
IR LEDs-	24 PCS

Image Quality-	H.265/H.264: 1920x1080 at 60 fps
	H.265/H.264: 1280x720 at 60 fps
	H.265/H.264: 640x480 at 60 fps
	H.265 & H.264 Multimode Engine
	Compression Technology (Daul Codec)
	Support Simultaneous multiple streams
Image Adjustment-	Adjustable Image Size, Quality and Transmission Speed.
	Time, date, or custom text can be displayed on the image, and the display position can be set.
	Adjustable Brightness, Contrast, Saturation and Sharpness
	Support AGC、AWB、AES、BLC、WDR Features
Electronic Shutter-	1/2 ~ 1/100,000 Sec
Network Interface-	10/100 Mbps Ethernet, RJ-45
Communication Protocol-	IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS
Browser-	Microsoft Internet Explorer 6.0 or above
	Safari, Chrome or Firefox
Alarm and Event Management-	Motion Detection
	Notify via email or upload files to FTP
Users-	Maximum 8 users online monitoring simultaneously
	Multi-level user access control with password protection

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Maintenance-	Supports FOTA
I/O-	RJ-45 network port, power input port DC12V
Power-	DC12V or PoE IEEE802.3af Class 0
Max. Power Consumption-	3.6W(IR OFF), 10W(IR ON)
Weight-	Net weight: 735 g
Dimensions-	110 (Height) × 135 (Diameter)
Operating Temperature-	0 ~ 45 °C

Version updating is not going to inform, please check the on-going updating information