
VIN-DS755VEA-E6 5MP

Vandal Dome IP Camera



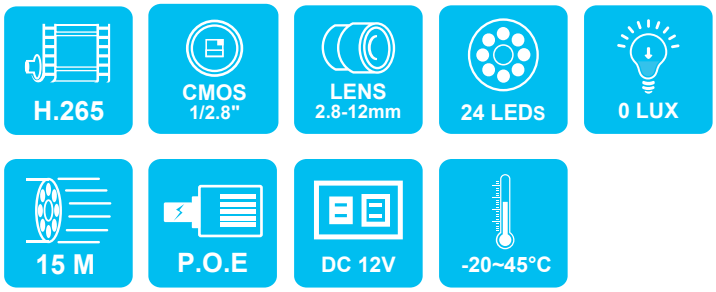

- SONY 5M Pixels 1/2.8" CMOS Sensor with excellent image quality
- Real-time H.265/H.264 compression (Dual Codec)
- Maximum resolution 2592x1944 at 30 fps
- 24 IR LEDs, IR Range 15M.
- Support the ONVIF international standard, best compatibility, and integration.

SPECIFICATIONS

System-	Flash：256MB
	RAM：512MB
Image Sensor-	Full HD High Quality 1/2.8" SONY CMOS Image Sensor
Lens-	2.8-12mm
ICR-	Built-in Magnetic Infrared Filter Switch
Low Lux-	0 Lux(IR ON)
LEDs-	Infrared X 24

Image-	H.265/H.264: 2592x1944 at 30 fps
	H.265/H.264: 2560x1440 at 60 fps
	H.265/H.264: 2048x1536 at 60 fps
	H.265/H.264: 1920x1080 at 60 fps
	H.265, H.264 multi-mode engine compression technology (Dual Codec)
	Support simultaneous multiple streams
Image Adjustment-	Adjustable image size, quality, and bit rate
	Time, date, or custom text can be displayed on the image, and the display position can be set.
	Adjustable brightness, contrast, saturation, and sharpness
	Support AGC、AWB、AES、BLC、WDR Features
Electronic Shutter-	1/2 ~ 1/100,000 Sec
Network Interface-	10 /100 Mbps RJ-45
Communication Protocol-	IPv4、TCP/IP、DHCP、HTTP、RTSP、SNTP、DNS
Browser-	Microsoft Internet Explorer 6.0 or above
	Safari, Chrome or Firefox
Alarm and Event Management-	Motion Detection
	Notify via email or upload files to FTP

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Users-	8 clients online monitoring simultaneously
	Multi-level user access control with password protection
Maintenance-	Supports FOTA
I/O-	RJ-45 network port, power input port DC12V
	Audio input and output (BNC-RS485 output), alarm output
Power-	DC12V or PoE IEEE802.3af Class 0
Max. Power Consumption-	3.6W(IR OFF)、10W(IR ON)
Weight-	Net weight: 690 g
Dimensions-	110 (Height) × 135 (Diameter)
Operating Temperature-	-20 ~ 45 °C

Version updating is not going to inform, please check the on-going updating information