
VIN-DS755VEA-E8 8MP

IP camera



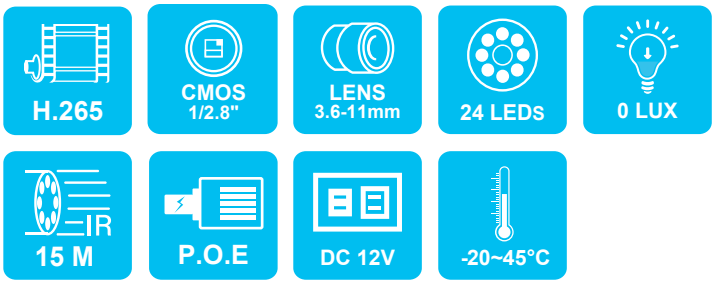

- SONY 8MP Pixels 1/2.8" CMOS Sensor with excellent image quality
- Real time H.265/H.264 Multi-Mode compression (Dual Codec)
- Resolution 3840x2160 @ 30fps
- 24pcs IR LED, IR Distance 15M
- Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

System-	Flash: 256MB
	RAM: 512MB
Image Sensor-	Full HD High Quality 1/2.8" SONY CMOS Image Sensor
Lens-	Varifocal 3.6~11mm
ICR-	Removable IR Cut filter
Low Lux-	0 Lux (IR ON)
Number of LED-	24pcs IR LED

Image-	H.265/H.264: 3840x2160 at 30 fps
	H.265/H.264: 3072x2048 at 30 fps
	H.265/H.264: 2592x1944 at 30 fps
	H.265/H.264: 2560x1440 at 30 fps
	H.265/H.264: 2048x1536 at 30 fps
	H.265、H.264 Multi-mode compression (Dual Codec)
	Multi-mode compression streaming
Image Adjustment-	Resolution、Quality and bit rate
	Time、Date or custom text and it's position
	Brightness, Contrast, Saturation and Sharpness
	AGC、AWB、AES、BLC、WDR
Electronic Shutter-	1/2 ~ 1/100,000 Sec
Network Interface-	10 /100 Mbps RJ-45
Communication Protocol-	IPv4,TCP/IP, DHCP, HTTP, RTSP,SNTP,DNS
Browser-	Microsoft Edge、Google Chrome
Alarm and Event Management-	Motion Detection
	E-mail notification or upload file to FTP
Users-	Max. 8 users for live view simultaneously
	User Authorization

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Maintenance-	OTA for Firmware upgrade
I/O-	RJ-45 network port, power input port DC12V Audio input and output (BNC-RS485 output), Alarm output
Power-	DC12V or PoE IEEE802.3af Class 0
Max. Power Consumption-	3.6W(IR OFF), 10W(IR ON)
Weight-	Net Weight: 690g
Dimension-	W:Φ135mm, H:110mm
Operating Temperature-	-20 ~ 45 °C

Version updating is not going to inform, please check the on-going updating information