
VIN-US731TEA-E6 5MP IP67

Electronic AF Motor Lens IP Camera



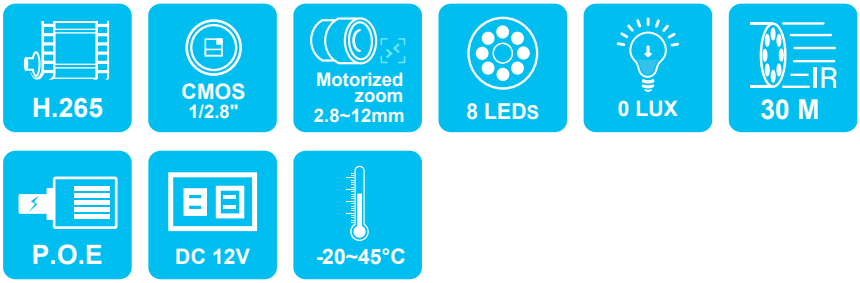

- SONY 5MP 1/2.8" CMOS image sensor with excellent image quality
- Real-time H.265, H.264, MJPEG compression (Dual Codec)
- Built-in electronic auto focus (AF) lens motor, user friendly for remote config
- Maximum resolution 2592x1944 at 30 fps
- 8 High Power IR LEDS, IR Range 30 M
- Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

System-	Flash：256MB
	RAM：512MB
Image Sensor-	Full HD High Quality 1/2.8" SONY CMOS Image Sensor
Lens-	Motorized / Automatic Zoom 2.8~12mm
ICR-	Removable IR Cut filter
Low Lux-	0 Lux (IR ON)
Number of LED-	HI-P 8 LED

Image-	H.265/H.264: 2592x1944 at 30 fps
	H.265/H.264: 2560x1440 at 60 fps
	H.265/H.264: 2048x1536 at 60 fps
	H.265/H.264: 1920x1080 at 60 fps
	H.265、H.264、JPEG Multi-mode compression (Dual Codec)
	Multi-mode compression streaming
Image Adjustment-	Resolution、Quality and bit rate
	Time、Date or custom text and it's position
	Brightness, Contrast, Saturation and Sharpness
	AGC、AWB、AES、BLC、WDR
Electronic Shutter-	1/2 ~ 1/100,000 Sec
Network Interface-	10 /100 Mbps RJ-45
Communication Protocol-	IPv4,TCP/IP, DHCP, HTTP, RTSP,SNTP,DNS
Browser-	Microsoft Internet Explorer 6.0 or above
	Safari, Chrome or Firefox
Alarm and Event Management-	Motion Detection
	E-mail notification or upload file to FTP

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Users-	Max. 8 users for live view simultaneously User Authorization
Maintenance-	OTA for Firmware upgrade
I/O-	RJ-45 network port, power input port DC12V Audio input and output (BNC-RS485 output), Alarm input and output, Reset button
Power-	DC12V or PoE IEEE802.3af Class 0
Max. Power Consumption-	3.6W(IR OFF) 、 12W(IR ON)
Weight-	N.W.：870g
Dimension (WxDxH)-	315 x 88 x 87 mm
Operating Temperature-	-20 ~ 45 °C
IP Rating-	IP67

Version updating is not going to inform, please check the on-going updating information