


VVG-MDE56C

Highest Resolution 2CH Motorbike Video Recorder



(Optional)

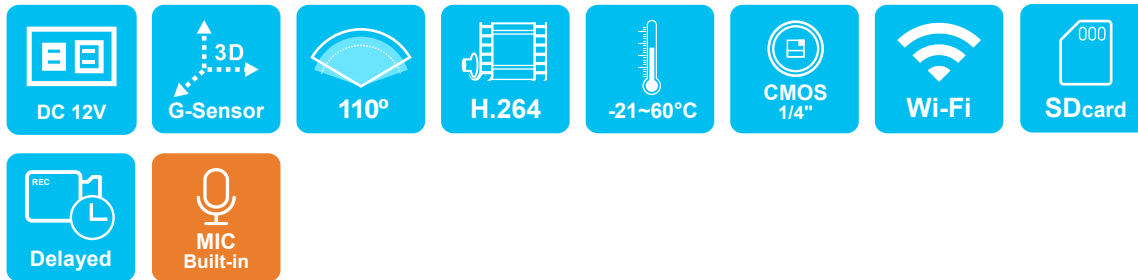

- > Small independent system, 2 channels video.
- > H.264 compression format, FHD video resolution.
- > Low power consumption and efficient dissipation, no build-in Lithium battery to prevent possible danger and heat explosion.
- > Devices starts recording automatically when engine is on, file is well formatted and saved securely with extension recording by supercapacitor.
- > USB WiFi dongle, through APP for live view /playback and video download

| DVR Host

| | |
|----------------------------------|---|
| Display Mode- | 2CH Camera |
| Mode- | Record/Play |
| Resolution- | 2CH Highest Resolution |
| Copy/Record- | SD |
| Host light- | REC |
| Signal Notice- | YES |
| SD card- | YES |
| G-SENSOR- | YES |
| WIFI- | WIFI Dongle, APP connection |
| System- | Recording automatically when engine is on |
| Built-In super capacitor- | YES |
| Power Consumption- | DC 12V |
| Temperature Tolerance- | -21°C~60°C |

| OBD specification (optional)

| | |
|--|-----------------|
| Light- | 2LED (WIFI\REC) |
| Interrupted- | Yes |
| Microphone- | Audio input |
| Waterproof and dustproof level- | IP66 |

Version updating is not going to inform, please check the on-going updating information

| Motorbike Camera

| | |
|--------------------------------|--|
| Power- | DC5V±10% input Power Consumption 100mA |
| Resolution- | Highest Resolution (Hi-Res) |
| Image Sensor- | 1/4" CMOS sensor |
| View Angle- | H:110 ° |
| Temperature Tolerance- | Operation:-20°C ~60 °C (In disclosed space) Storing temperature:-40 °C~85 °C |
| Output terminal- | Micro Din |
| Dust & Water proof- | IP67 |
| Size- | Ø21mm × 23.5mm |

Version updating is not going to inform, please check the on-going updating information