


# VVN-MDE08C

## Dual CH Video Recorder

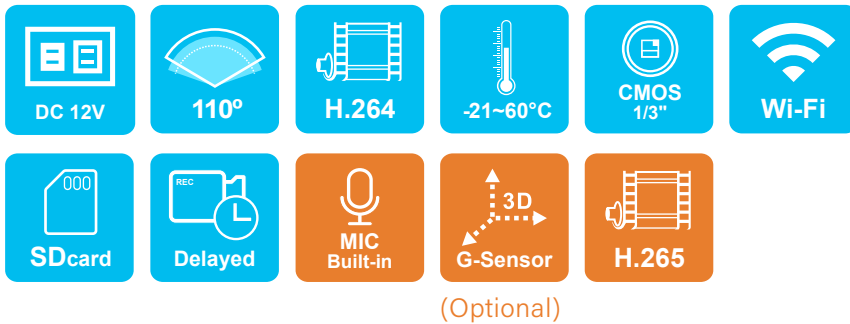

- › Miniature video recording system supports 2 CH 1080P video input, built-in LED indicator, optional for Mic.
- › H.264 compression without distortion, FHD video resolution, upgrade to H.265 compression saving space of storage.
- › Vehicle power supply, low power consumption, good heat dissipation, no built-in lithium battery, no fear of high temperature, no burst doubts.
- › The device will automatically boot and then loop-record after vehicle engine is started; automatically archive and then turn off after vehicle engine is stopped.
- › file is well formatted and saved securely with extension recording by built-in supercapacitor.
- › USB WiFi dongle, through APP for live view /playback and video download.
- › M.I.T Novatek Soc, Durable, Reliable and clear image solution.
- › Embedded OS, vision-based driver assistance system for long operation/Record Application.
- › Professional file formats to ensure completed footage without lose and to avoid SD card damaged.
- › Suitable for different kind of SD Cards, Card health status can be checked if Vacron Smart Card is used.

## SPECIFICATIONS

---

<b>Record Frame-</b>	2CH 1080P@30FPS
<b>Display Mode-</b>	Dual CH Mode
<b>Simplex-</b>	Rec / Playback
<b>Resolution-</b>	Display:1920x1080 / Rec:1920x1080
<b>Backup/Record-</b>	SD ; Vacron Smart Card Supported
<b>Indication LED-</b>	REC 、WiFi
<b>Video Lose-</b>	Yes
<b>SD Card-</b>	Yes
<b>G-SENSOR-</b>	Yes(Optional)
<b>WIFI-</b>	Yes, through APP
<b>Systeme-</b>	The recording will resume once power is restored
<b>Built-in Super Capacitor-</b>	Yes
<b>Power input-</b>	input voltage DC12V
<b>Operation Temperature-</b>	-20°C ~ 60°C

## Multifunction Monitor (Optional)

---

<b>GPS-</b>	Yes
<b>Microphone-</b>	Audio input
<b>Indicator light-</b>	4 LED (WIFI 、REC 、GPS 、Power)
<b>Disconnection check-</b>	yes
<b>IP Rating-</b>	IP66

---

All specifications shown are typical unless otherwise stated and are subject to change without notice.

## Camera Specification

---

**Power Input-** Input Voltage DC5V  $\pm$ 10%  
Power Consumption 100mA

**Resolution-** 1920(H) X 1080(V)

**Sensor-** 1/3" CMOS Sensor

**View Angle-** H: 110°  $\pm$ 3  
V: 65°  $\pm$ 3  
D: 150°  $\pm$ 3

**Temperature Range-** Operating Temperature : -20°~60°  
(Natural Convection Environment)  
Storage Temperature : -40°~85°

**Output terminal-** Micro DIN

**Dust & Water proof-** IP67

**Size-**  $\varnothing$ 25mm  $\times$  38mm

## Matching application

---



Android



iOS



All specifications shown are typical unless otherwise stated and are subject to change without notice.