


VCF-5G60U-A 5MP IP66

AHD Camera

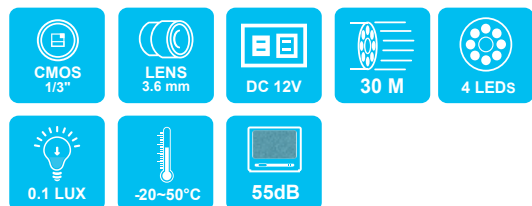

SPECIFICATIONS

Pick Up Element-	1/3" CMOS sensor
Video System-	NTSC / PAL
Image Signal Process-	Digital Signal Processor
Lens-	3.6mm
Number Of Pixel-	2560 (Horizontal) x 1944(Vertical)
Horizontal Resolution-	5MP@20fp/12.5fp 2MP@25fp/30fp
Power Supply-	DC 8~28V
Power Consumption-	120mA(IR Off) : 330mA(IR On)
ICR-	Support
Format-	25FPS / 30FPS / PAL / NT
Audio-	TVI support
S/N Ratio-	≥55dB
White Balance-	Auto
Gain Control-	Auto
Gamma correction-	Auto
Day Night Auto Switch-	Support
LEDs-	4 PCS
IR Range-	30M
IR Wavelength-	850nm
Minimum Illumination-	0.1LUX
OUTPUT-	AHD/TVI/CVI/CVBS (Default setting: TVI Mode)
Language-	ENGLISH//CHINESE / TRADITIONAL CHINESE
IP Rating-	IP66
Operating Temperature-	-20°C~50°C
Dimensions (H×W×D)-	190mm x 71mm x 59 mm
Weight-	About 310g

Safety Precautions

× Before using the product, please ensure that you read the safety precautions described below.

Always ensure that the product is used correctly.

- Use only recommended power sources.
- Do not attempt to disassemble, alter or apply heat to the product.
- Avoid dropping or subjecting the product to severe impacts.
- To avoid the risk of injury, do not touch the interior of the product if it has been dropped or otherwise damaged.
- Stop using the product immediately if it emits smoke, a strange smell, or otherwise behaves abnormally.
- Do not use organic solvents such as alcohol, benzene, or thinner to clean the product.
- Do not allow liquids or foreign objects to enter the camera.
- Do not place the camera near or in direct flame.
- Do not handle the power cord with wet hands.
- Do not use the equipment in a manner that exceeds the rated capacity of the electrical outlet or wiring accessories.
- Do not use if the power cord or plug are damaged, or not fully plugged into the outlet.
- Do not allow dirt or metal objects (such as pins or keys) to contact the terminals or plug.

OSD Controller(option)




OSD Manual

AE	←BRIGHTNESS / EXPOSURE MODE
AWB	←MODE
DAY/NIGHT	←MODE
IMAGE ENHANCE	←CONTRAST / SHARPNESS / SATURATE / 2DNR /DWDR
VIDEO SETTING	←HD / STANSARD
LANGUAGE	《	《ENGLISH》	...ENGLISH//CHINESE /TRADITIONAL CHINESE
LED			...INFRARED/DUAL LIGHT/FULL COLOR
RESET			
SAVE&EXIT			
EXIT			

VCF-5G60U-A 5MP IP66

AHD 攝影機

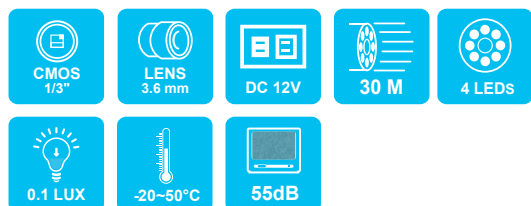

商品規格

影像元件-	1/3" CMOS 影像感應器
信號模式-	NTSC/PAL
影像訊號處理系統-	數位訊號處理系統
視覺角度-	3.6mm
有效像素-	2560 (水平) × 1944 (垂直)
解析度-	5MP@20fp/12.5fp 2MP@25fp/30fp
輸入電壓-	DC 8~28V
消耗功率-	120mA (IR Off); 330mA (IR On)
ICR-	支援
制式-	25FPS / 30FPS / PAL / NT
音頻-	TVI支持同軸音頻傳輸
信噪比-	≥55dB
自動白平衡-	自動
自動增益-	自動
伽瑪校正-	自動
日夜轉換-	支援
LED顆數-	4 PCS
投射距離-	30M
紅外線波長-	850nm
最低照度-	0.1LUX
輸出-	AHD/TVI/CVI/CVBS (出廠設定: TVI 模式輸出)
語言-	ENGLISH/中文/繁體
防水防塵等級-	IP66
工作溫度-	-20°C~50°C
尺寸 (W×D×H)-	190mm x 71mm x 59 mm
重量-	大約310g

安全注意選項

×使用本產品之前，請確定您已閱讀下列的安全注意事項。
並請確定您操作產品的方法是正確的。

- 請存放本器材於兒童與嬰兒無法觸碰的地方
- 請只使用建議的電源
- 請勿嘗試將產品拆開、改裝或加熱
- 避免使產品丟落地上或受猛烈撞擊
- 要避免受傷，請勿在產品跌下後或損毀時觸碰產品的內部
- 如產品冒煙、發出異味或有其他異常，請立刻停止操作產品
- 請勿使用有機溶劑，如酒精、苯或油漆稀釋劑清潔產品
- 請勿讓任何液體或異物進入機器
- 請勿將電池置於熱源附近，或暴露於火焰中
- 請勿使用濕手觸碰電源線
- 請勿將本器材用於超出指定電壓的電源插座或線路配件
- 請勿使用損毀的電源線或插頭，或沒有完全插入電源插座
- 請避免端子或插頭接觸到金屬物件（如針或鑰匙）或污漬

OSD控制線(選配)



OSD操作選單

曝光	←	亮度/曝光模式
白平衡	←	模式
日夜切換	←	模式
圖像增強	←	對比度/銳度/飽和度/2D降噪/DWDR
視頻設置	←	模式/制式
語言	《繁體》	中文/繁體/ENGLISH
LED		紅外/雙燈/全彩
恢復出場設置			
保存退出			
退出			