


VIG-US760T 1080P / IP66

Electronic Auto AF motor lens IP camera



(Optional)

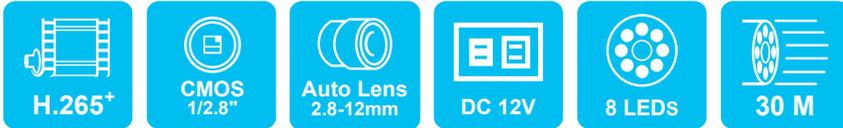

- > Sony Exmor 1/2.8" COMS Image Sensor
- > Built in electronic auto AF Lens motor, user friendly for remote config
- > Real-time H.264,H.265+,Mjpeg Compression(dual codec)
- > Highest Resolution 1920x1080 @30 fp
- > HI-POWER LED 8PCS , 30M IR ranges
- > Supports ONVIF Standard to Simplify integration and Enhance Interoperability
- > Support Micro SD card local storage

SPECIFICATIONS

model-	VIG-US760T
system-	Flash : 16MB RAM : 256MB
Image Sensor-	FullHD High Quality 1/2.8"Sony Exmor CMOS Image Sensor
Lens-	Auto Varifocal 2.8-12mm f1.4
IR-cut-	Removable IR-cut filter for day & night function
<hr/>	
Video-	H.265+: 1920x1080 at 30fps H.265+: 1280x720 at 30 fps H.265+: 640x480 at 30fps Compression: H.264, H.265+, MJPEG Streaming: Dual Codec Selectable Support Simultaneous multiple streams
Image Settings-	Adjustable image size,quality, and bit rate Time/Date stamp and text caption overlay. Configurable brightness, contrast, saturation, sharpness,white balance and exposure Have: AGC 、AWB 、AES 、BLC 、WDR Features
Networking Interface-	10 /100 Mbps Ethernet,RJ-45
Support Protocol-	IPv4,TCP/IP, DHCP, HTTP, RTSP,SNTP,DNS
Support browser-	Microsoft Internet Explorer 6.0 or above Safari, Chrome or Firefox
Alarm and Event Management-	Motion Detection Event notification using SMTP or FTP

Specifications are subject to change without prior notice.

SPECIFICATIONS

Users-	8 clients on-line monitoring at the same time Multi-level user access control with password protection
Maintenance-	Supports online firmware upgrade
I/O-	RJ-45 Ethernet x 1, DC Jack x1, RCA audio in x1, SD card recording
Power-	DC12V or PoE IEEE802.3af Class 0 (optional)
Max. Power Consumption-	3.6W(IR OFF) 、7W(IR ON)
Weight-	Net weight : 650g
Dimension-	255mm x 75.3mm x 75mm
Operating Environments-	0 ~ 45 °C
IP Rating-	IP66

Specifications are subject to change without prior notice.