



ONVIF 1.3 Megapixel IR Bullet

IP Camera



NEW 2013 MAY. V2.0



IP Surveillance

VIH-UH825

- 1.3-megapixel CMOS Sensor.
- Highest Resolution H.264:
1280x1024 at 25 fps
- Real-time H.264 Compression
- 42 Pcs IR LED
- Auto IR cut filter for Day and Night
- Supported external microphone input
- Supports ONVIF Standard to Simplify
Integration and Enhance Interoperability
- Supports H/W Watchdog

VIH-UH825 1.3 Megapixel IR Bullet IP Camera

1.3
MEGA
PIXEL

1/4" CMOS

LENS
4.2mm

42 LEDs

IR Cut

Motion

H.264

1280x1024

30 FPS

LAN

MAIL



IP 66

Cable Installing Instruction



1. MIC IN
2. POWER
3. LANPORT

Dimension Unit: mm

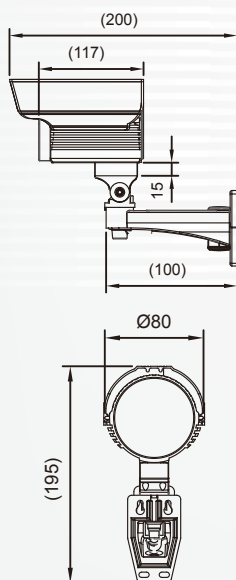

■ DISTRIBUTED BY

SPECIFICATIONS

System	CPU : ARM9 SoC	
	Flash : 16MB	
	RAM : DDR2 128MB*2	
Image Sensor	1.3 Mega pixel 1280*1024(SXGA) 1/4" CMOS Sensor	
Lens	Board Lens 4mm F1.6	
	Removable IR-cut filter for day & night function	
IR LED	42PCS	
Video	H.264: 1280x1024 at 25 fps	
	H.264: 1280x720 at 30 fps	
	H.264: 640x480 at 30 fps	
	H.264: 320x240 at 30 fps	
	Support Dual streaming	
Image Settings	Adjustable image size, quality, and bit rate	
	Configurable brightness, contrast, saturation, sharpness	
	Time/Date stamp and text caption overlay.	
Audio	G.711 audio encoding	
	Supported external microphone input	
Network	Interface	10/100 Mbps Ethernet
	Supported Protocol	IPv4,TCP/IP, DHCP, HTTP, FTP, SMTP, RTSP,SNTP,DNS
	Supported Browser	Microsoft Internet Explorer 6.0 or above
Alarm and Event management	Motion Detection	
	Event notification using SMTP, or FTP	
I/O port	RJ-45 Ethernet , Power connection ,Phone Jack Mic input	
Maintenance	Supports online firmware upgrade	
Power supply	DC12V or PoE IEEE802.3af Class 0	
Weight	Netweight : 723g	
Dimension	Φ80x195x200mm	
Operating Environments	Temperature: 0 ~ 45 °C / Humidity: 90%	

★Version updating is not going to inform, please check the on-going updating information

