


VIN-UJ709-F7 5MP

IP Camera

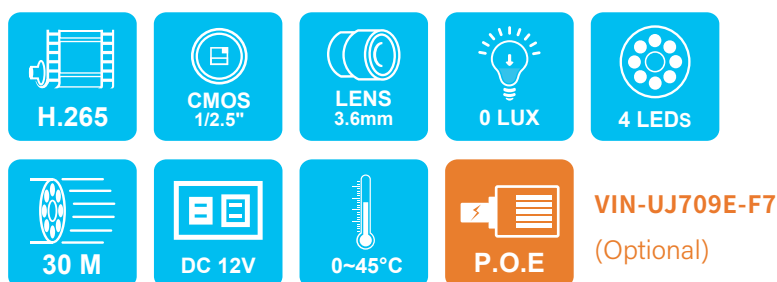

- › 5MP 1/2.5" CMOS Image Sensor with excellent image quality
- › Real-time H.265, H.264, MJPEG compression (Dual codec)
- › Maximum resolution 2560x1920 at 30 fps
- › 4 High Power IR LEDs, IR Range 30 M
- › Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

Video System-	Flash : 128MB RAM : 128MB
Image Sensor-	FullHD High Quality 1/2.5" CMOS Image Sensor
Lens-	3.6 mm
IR-cut-	Built-in Magnetic Infrared Filter Switch
Low Lux-	0 Lux (IR ON)
IR LEDs-	High Power IR LEDS X 4

Image Quality-	H.265/H.264: 2560x1920 at 30 fps H.265/H.264: 1920x1080 at 30 fps H.265+ 、 H.264 、 JPEG Multi-mode compression (Dual Codec) Support simultaneous multiple streams
Image Settings-	Adjustable image size, quality, and bit rate Time/Date stamp and text caption overlay Adjustable brightness, contrast, saturation, and sharpness Support AGC 、 AWB 、 AES 、 BLC 、 WDR Features

Electronic Shutter- 1/2 ~ 1/100,000 Sec

Network Interface- 10/100 Mbps Ethernet, RJ-45

Communication Protocol- IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS

Browser- Microsoft Internet Explorer 6.0 or above
Safari, Chrome or Firefox

Alarm and Event Management- Human Detection Alarm
(Alarm Zone setting and Intrusion Alarm setting)
Notify via email or upload files to FTP.

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Users-	8 clients online monitoring simultaneously. Multi-level user access control with password protection.
Maintenance-	Supports FOTA
I/O-	RJ-45 network port, power input port DC12V
Power-	DC12V or PoE IEEE802.3af Class 0
Max. Power Consumption-	3.6W(IR OFF) 、18W(IR ON)
Weight-	Net weight: 502g
Dimensions-	262mm x 91mm x 83mm
Operating Temperature-	0°C ~ 45°C

Version updating is not going to inform, please check the on-going updating information