


# VIN-US730-E6 5MP IP66

## IP Camera

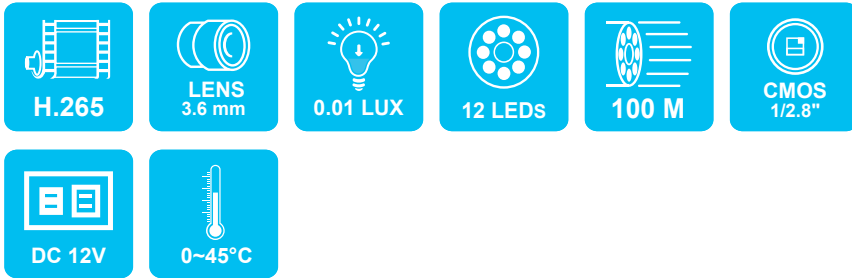

- › Sony 5MP 1/2.8" COMS Image Sensor
- › Real-time H.265/H.264 /Mjpeg Compression(dual codec)
- › Highest Resolution 2592\*1944 @30 fps
- › HI-P 12 LED, IR Distance 100M
- › Support ONVIF international standard, best compatibility and integration

## SPECIFICATIONS

---

- System-** Flash : 256MB  
RAM : 512MB
- Sensor-** SONY FullHD High Quality 1/2.8" CMOS Image Sensor
- Lens-** 3.6mm Lens
- IR Cut-** Removable IR-cut filter for day & night function
- Lux-** 0.01Lux
- LED-** HI-P 12 IR LED
- 

- Compression-** H.265/H.264: 2592x1944 at 30 fps  
H.265/H.264: 2560x1440 at 60 fps  
H.265/H.264: 2048x1536 at 60 fps  
H.265/H.264: 1920x1080 at 60 fps  
H.265、H.264、JPEG Multi-mode compression (Dual Codec)  
Support Simultaneous multiple streams

- Video Adjustment-** Adjustable image size, quality, and bit rate  
Time/Date stamp and text caption overlay  
Configurable brightness, contrast, saturation, sharpness, white balance and exposure  
Have: AGC、AWB、AES、BLC、WDR Features

- Network Interface-** 10 /100 Mbps, RJ-45
- Protocol-** IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS
- Browser-** Microsoft Internet Explorer 6.0 or above  
Safari, Chrome or Firefox

- Alarm & Event notification-** Motion Detection  
Event notification using SMTP or FTP
- User-** clients on-line monitoring at the same time  
Multi-level user access control with password protection
- 

Version updating is not going to inform, please check the on-going updating information

## SPECIFICATIONS

---

**Maintenance-** Supports online firmware upgrade

**I/O-** RJ-45 Ethernet x 1,DC12V

**Power-** DC12V

**Max. Power Consumption-** 3.6W(IR OFF) 、 7W(IR ON)

**Weight-** N.W. : 650g

**Dimension-** 255mm x 75.3mm x 75mm

**Operating Environments-** 0 ~ 45 °C

**IP Rating-** IP66

---

Version updating is not going to inform, please check the on-going updating information

Distributed BY

FUHO TECHNOLOGY CO., LTD.