


VDN-NKZ804D 5MP

4CH Network video recording system

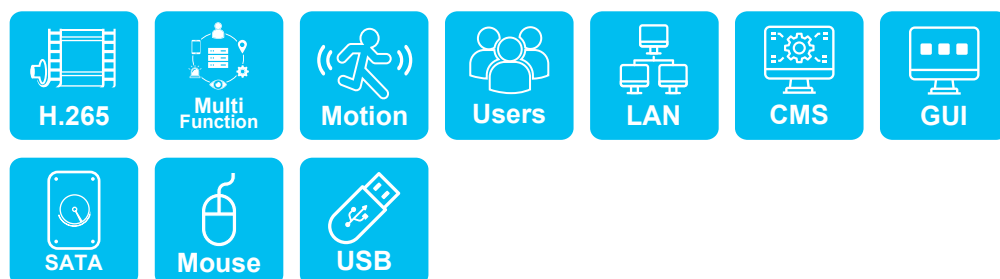

- › Multi-tasking, simultaneous recording/playback/remote connection/backup/
mobile phone monitoring and playback
- › The maximum capacity of a single hard drive is 8TB
- › Support HD super high quality output.
- › Remote IE browsing, with video monitoring and playback functions
- › Provide HTTP, DHCP, DDNS, NTP, SMTP, FTP, DNS, UPNP, PPPoE, IP authority,
IP search and other network services
- › Support iPhone and Android for live monitoring and playback.
- › Support CMS (Central Management System)
- › With P2P function, APP can scan QR-Code for real-time monitoring and playback,
increasing information security.
- › Set DVR as IPCAM mode, just plug-n-play with FUHO IP Cam.
- › Support for automatic firmware updates.

SPECIFICATIONS

Video input-	4CH 5MP
Video output-	VGA (Max. 1920x1080) HD(Max. 1920x1080) CVBS
I/O interface-	RJ-45*1, 10/100 Base-T USB2.0*2
Audio output-	1 ch output
Audio Compression-	G.711U
Display resolution-	1080P

Auto Sequence Duration-	Yes
Image decoding method-	H.264/H.265
Monitoring-	VGA at 30 FPS per second mode, capable monitoring maximum 4 channel real-time video. 1080P at 15 FPS per second mode, capable monitoring maximum 1 channel real-time video.
Recording mode-	Continuous / Schedule / Motion
Motion detection-	Zones: 192(16×12 grid)
Playback-	Video playback support 1 channel 1080P at 15 FPS per second or 4 channel VGA at 30 FPS per second.
Display mode-	Single, Quad, Sequence
File format-	MP4/Custom Format
Media interface-	USB/Network
Network playback-	Yes
Network protocol-	HTTP 、DHCP 、DDNS 、NTP 、SMTP 、FTP 、DNS 、UPNP 、PPPoE 、IP Authority 、IP Search
Browser	IE
Web-	Live view, search/playback, backup, and upgrade

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

Storage HDD interface-	SATA
Maximum support capacity-	Maximum 8TB HDD
Internal HDD-	1 pcs
File system-	Stable and reliable self-developed file system
S.M.A.R.T-	HDD error detecting
Menu display-	GUI interface VGA & HD out& CVBS simultaneously display
Input method-	Mouse

Internal buzzer-	Start-up Beep
Language-	English / Simple Chinese/ Traditional Chinese/ Japanese
Firmware Update-	USB and Network Remote Upgrade
App monitoring-	iPhone, Android, mobile App supports live view (includes audio) and playback.
CMS(Central Management System)	Support
Operating environment-	Temperature 0~55°C, Humidity: 20~80%
Power-	DC 12V / 3A(AC100V~240V 50/60HZ)
Net weight-	About 0.5kg (without HDD and Power Adapter)
Dimensions-	255mm x 216mm x 42mm (L x W x H)

Version updating is not going to inform, please check the on-going updating information