


VIG-DS758-D2 1080P

Indoor IP Camera

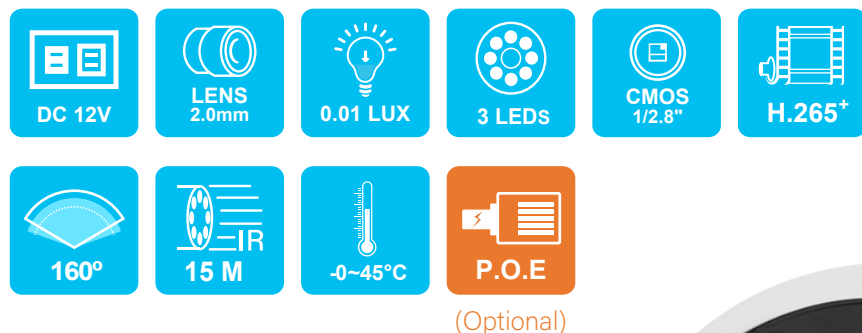

- › Sony 2MP 1/2.8" COMS Image Sensor
- › Real-time H.265+/H.264/MJPEG Compression(dual codec)
- › Highest Resolution 1920*1080 @ 30fps/s
- › HI-P 3 LED, IR Distance 15M
- › Wider monitoring range up to 160° horizontal view angle
- › Support ONVIF international standard, best compatibility and integration

| SPECIFICATIONS

system- Flash : 16MB

RAM : 256MB

Image Sensor- Full HD High Quality 1/2.8" CMOS Image Sensor

Lens- Board Lens 2.0 mm

IR-cut- Removable IR-cut filter for day & night function

Low Lux- 0.01Lux

LED- HI-P 3 IR LED

Compression- H.265+: 1920x1080 at 30fps

H.265+: 1280x720 at 30 fps

H.265+: 640x480 at 30fps

H.265+ 、 H.264 、 JPEG Multi-mode
compression (Dual Codec)

Support Simultaneous multiple streams

Image Settings- Adjustable image size, quality, and bit rate

Time/Date stamp and text caption overlay

Configurable brightness, contrast, saturation,
sharpness, white balance and exposure

Have: AGC 、 AWB 、 AES 、 BLC 、 WDR Features

Electronic Shutter- 1/2 ~ 1/100,000 Sec

Networking Interface- 10 /100 Mbps, RJ-45

Protocol- IPv4, TCP/IP, DHCP, HTTP, RTSP, SNTP, DNS

browser- Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

Alarm and Event Management- Motion Detection

Event notification using SMTP or FTP

Version updating is not going to inform, please check the on-going updating information

| SPECIFICATIONS

Users-	clients on-line monitoring at the same time Multi-level user access control with password protection
Maintenance-	Supports online firmware upgrade
I/O-	RJ-45 Ethernet x 1,DC12V
Power-	DC12V or PoE IEEE802.3af Class 0 (optional)
Max. Power Consumption-	3.6W(IR OFF) 、 10W(IR ON)
Weight-	N.W. : 350g
Dimension-	W:Φ120mm H:70mm
Operating Environments-	0 ~ 45 °C

Version updating is not going to inform, please check the on-going updating information