


VIG-UJ708-Z5 1080P

IP Camera



VIG-UJ708E-Z5
(Optional)

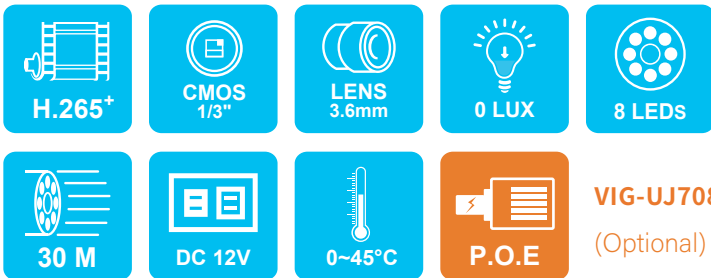

- > 2MP 1/3" COMS Image Sensor
- > Real-time H.265+, H.264, MJPEG compression (Dual codec)
- > Maximum resolution 1920x1080 at 30 fps
- > 8 High Power LEDS, IR Range 30 M
- > Support ONVIF international standard, best compatibility and integration.

SPECIFICATIONS

System-	Flash : 16MB RAM : 128MB
Image Sensor-	FullHD High Quality 1/3" CMOS Image Sensor
Lens-	3.6mm
IR-cut-	Built-in Magnetic Infrared Filter Switch
Low Lux-	0 Lux(IR ON)
IR LEDs-	High Power IR LEDS X 8
Image Quality-	H.265+: 1920x1080 at 30fps H.265+: 1280x720 at 30fps H.265+: 640x480 at 30fps H.265+ 、H.264 、JPEG Multi-mode compression (Dual Codec) Support Simultaneous multiple streams
Image Settings-	1.Adjustable Image Size, Quality and Transmission Speed. 2.Time, date, or custom text can be displayed on the image, and the display position can be set. 3.Adjustable brightness, contrast, saturation and sharpness. 4.Support AGC 、AWB 、AES 、BLC 、WDR Features
Electronic Shutter-	1/2~1/100,000 Sec
Interface-	10/100 Mbps Ethernet, RJ-45
Communication Protocol-	IPv4 、TCP/IP 、DHCP 、HTTP 、RTSP 、SNTP 、DNS
Browser-	Microsoft Internet Explorer 6.0 or above Safari, Chrome or Firefox
Alarm and Event Management-	Motion Detection
Users-	Event notification using SMTP or FTP Up to 8 users can view online simultaneously.

Version updating is not going to inform, please check the on-going updating information

| SPECIFICATIONS

Maintenance-	Multi-level user access control with password protection. Supports FOTA
I/O-	RJ-45 network port, power input port DC12V
Power-	DC12V or PoE IEEE802.3af Class 0 (optional)
Max. Power Consumption-	3.6W(IR OFF) 、18W(IR ON)
Operating Temperature-	0°C ~ 45°C
Weight-	Net weight: 670 g
Dimensions-	262mm x 91mm x 83mm

Version updating is not going to inform, please check the on-going updating information