


VIN-US731V-E6 5MP IP67

IP Camera

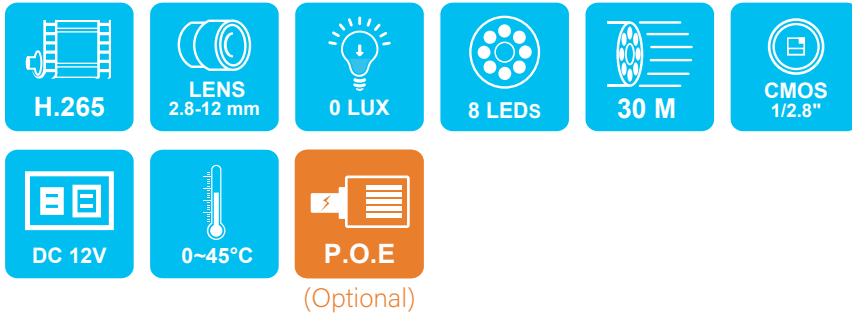

- › SONY 5M Pixels 1/2.8" CMOS Sensor with excellent image quality
- › Real time H.265/H.264 /MJPEG Multi-Mode compression (Dual Codec)
- › Resolution 2592*1944 @ 30fps/s
- › HI-P 8 LED, IR Distance 30M
- › Support ONVIF international standard, best compatibility and integration

SPECIFICATIONS

System- Flash : 256MB

RAM : 512MB

Sensor- Full HD High Quality 1/2.8" SONY CMOS Image Sensor

Lens- Vari-focal 2.8~12mm

IR Cut- Removable IR Cut filter

Lux- 0 Lux(IR ON)

LED- HI-P 8 LED

Compression- H.265/H.264: 2592x1944 at 30 fps

H.265/H.264: 2560x1440 at 60 fps

H.265/H.264: 2048x1536 at 60 fps

H.265/H.264: 1920x1080 at 60 fps

H.265、H.264、JPEG Multi-mode compression (Dual Codec)

Multi-mode compression streaming

Video Adjustment- Resolution、Quality and bit rate

Time、Date or custom text and it's position

Brightness, Contrast, Saturation and Sharpness

AGC、AWB、AES、BLC、WDR

Network Interface- 10 /100 Mbps RJ-45

Protocol- IPv4,TCP/IP, DHCP, HTTP, RTSP,SNTP,DNS

Browser- Microsoft Internet Explorer 6.0 or above

Safari, Chrome or Firefox

Alarm & Event notification- Motion Detection

E-mail notification or upload file to FTP

User- Max. 8 users for live view simultaneously

User Authorization

OTA- OTA for Firmware upgrade

Version updating is not going to inform, please check the on-going updating information

SPECIFICATIONS

I/O Port-	RJ-45, DC12V
Power-	DC12V or PoE IEEE802.3af Class 0 (optional)
Power Consumption-	3.6W(IR OFF) 、 18W(IR ON)
Weight-	N.W. : 965g
Dimension-	315x88x87 mm
Operating Environments-	0 ~ 45 °C
IP-	IP67

Version updating is not going to inform, please check the on-going updating information

Distributed BY

FUHO TECHNOLOGY CO., LTD.

Head Office: No. 30, Lane 726, Jinma Rd, Sec. 3, Chang Hua City, Taiwan 500. TEL:886-4-751-2881

www.vacron.com